Docx4j - Getting Started

Contents

What is docx4j? 5

What sorts of things can you do with docx4j? 6

Is docx4j for you? 6

GraalVM 7

docx4j.NET 7

What Word documents does it support? 7

Handling legacy binary .doc files 8

A word about Jaxb 8

Using docx4j via Maven 9

Using docx4j bundles 9

Using docx4j binaries 10

docx4j dependencies 11

- slf4j 11
  - slf4j and docx4j-bundle 11
- other dependencies 12

Docx4j source code 12

Javadoc 12

Building docx4j from source 12

- Command line -via Maven 12
- Eclipse 13
- Using a different IDE? 13

Open an existing docx/pptx/xlsx document 13

- Damaged packages 14

OpenXML concepts 15

Specification versions 15

Architecture 17

Jaxb: marshalling and unmarshalling 18

Parts List 19

MainDocumentPart 21
Samples 23
Creating a new docx 25
docx4j.properties 25
Adding a paragraph of text 26
General strategy/approach for creating stuff 28
Formatting Properties 29
Creating and adding a table 29
Selecting your insertion/editing point; accessing JAXB nodes via XPath 30
Traversing a document 30
Adding a Part 31
Importing XHTML 32
Markdown import and export 32
docx4j for AI agents (MCP) 33
Using an LLM with docx4j 33
Anonymising a document before you share it 33
docx to (X)HTML 34
docx to PDF 35
docx/pptx/xlsx to PDF via Documents4j (using Word) 36
docx/pptx/xlsx to PDF via Microsoft Graph 37
docx to PDF via XSL FO 37
Image Handling - DOCX 40
Windows metafiles (WMF, EMF, EMF+) 42
Manual Image Manipulation 43
Image Handling – PPTX 43
Adding Headers/Footers 43
Protection Settings 43
Tracked changes: accept and reject 44
Text extraction and inspection 45
Motivation 45
Reading the text 46
Where it differs from Word's own text, on purpose 47

Inspecting what the text does not show 48
Text substitution/document generation/reporting 49
Text substitution – document surface 49
Text substitution via data bound content controls 50
Binding extensions for repeats and conditionals 51
Binding escaped XHTML (XML + CSS) 52
Binding other rich content 52
Authoring 52
Fields 52
Field background 52
Updating fields: FieldUpdater 53
What the evaluator reads: FieldContext 54
Fields in text extraction and in PDF and HTML output 54
Generating an index 55
Mailmerge 55
docx Table of Contents 56
Introduction 56
TOC Content Control 56
TOC Field Syntax 57
Inserting/generating a TOC – "pure Java" considerations 59
Pagination: which page is a paragraph on? 59
Charts 60
Creating a chart 60
Editing a chart's data 61
Settings, reading and deleting 61
Presentations and workbooks 61
Drawing charts 62
Limitations 62
SmartArt 63
JAXB stuff 63
Cloning 63
javax.xml.bind.JAXBElement 63

@XmlRootElement 64
Merging Documents and Presentations 65
Appendix 1 – Font Mapping 66
FontsAnalysis: what a document uses, and what docx4j draws it with 69
Appendix 2 – Office font solutions 70
Aptos and the 2023 default theme 71

This guide is for docx4j 17.3.6 (Java 11 and later); most of it applies to 11.5.x as well.

Version numbering jumped from 11.5.14 to 17.0.0 in part because of the following API changes:

- old methods getEGBlockLevelElts, getParagraphContent, getRunContent have been replaced with getContent;
- ArrayListWml, ArrayListDml, ArrayListVml, and ArrayListMce have been replaced by a single ArrayListDocx4j class;
- org.jvnet.jaxb2_commons.ppp.Child is now org.jvnet.jaxb.lang.Child

This guide is also applicable for the most part to **8.3.x** which now in 2026 is considered obsolete. The 8.x series was the last series to run under Java 1.8 (hence the name)

The latest version of this document can always be found in docx4j on GitHub in /docs.

There is also a handy 1 page summary at https://www.docx4java.org/docx4j/plutext-docx4j_on_a_page-v300.pdf (look out for an update soon).

What is docx4j?

docx4j is a library for working with docx, pptx and xlsx files in Java. In essence, it can unzip a docx (or pptx/xlsx) "package", and parse the XML to create an in-memory representation in Java using developer friendly classes (as opposed to DOM or SAX).

docx4j is usually deployed as part of a web application (eg on Tomcat, JBOSS, WebSphere etc – see the deployment forums).

docx4j is similar in concept to Microsoft's OpenXML SDK, which is for .NET. docx4j.NET is available for the NET platform; see further below.

A distinctive strength of docx4j is that its in-memory representation uses **JAXB**, the JCP standard for Java - XML binding. Docx4j is the only library for working with OpenXML files which uses/supports JAXB (each of the Sun/Oracle, MOXy and IBM[1] implementations). In contrast, Apache POI uses XML Beans. (Aspose in contrast, does not provide low-level access to the underlying XML or a corresponding object model, so "you can't do it" unless Aspose provides support for it).

docx4j is open source, available under the Apache License (v2). As an open source project, docx4j has been substantially improved by a number of contributions (see the README or POM file for contributors), and further contributions are always welcome. Please see the docx4j forum at http://www.docx4java.org/forums/ for details.

The docx4j project is sponsored by Plutext (www.plutext.com).

[1] IBM has their own proprietary JAXB implementation. By default, WebSphere uses com.ibm.xml.xlxp2.jaxb, which has the concept of fallback/ MarshallerProxy. The actual implementation it uses is in com.ibm.jaxb.tools.jar.

There is also a commercial enterprise edition of docx4j, which comes with commercial support and additional functionality not found in the community edition. Additional functionality includes:

- Merging documents or presentations
- OLE embedding of files in docx, pptx, xlsx
- Digital signatures

What sorts of things can you do with docx4j?

- Open existing docx (from filesystem, SMB/CIFS, WebDAV using VFS), pptx, xlsx
- Create new docx, pptx, xlsx
- Programmatically manipulate the above (of course)
- Anonymize/sanitize a docx/pptx/xlsx
- Create charts, edit their data, and draw them in PDF and HTML output or as images (docx, pptx, xlsx)
- Save to various media zipped, or unzipped
- Protection settings
- Produce/consume the Flat OPC XML format

Specific to docx4j (as opposed to pptx4j, xlsx4j):

- Import XHTML
- Import and export Markdown (from 17.0.4), including TeX math to/from native equations
- Export as (X)HTML or PDF, including charts
- Template substitution; CustomXML binding (with support for pictures, rich text, checkboxes, and OpenDoPE extensions for repeats & conditionals, and importing XHTML)
- Mail merge
- Update fields as Word's F9 does: dates, document properties, REF and SEQ, formulas and IF, an INDEX from its XE marks
- Apply transforms, including common filters
- Diff/compare documents, paragraphs or sdt (content controls)
- Font support (font substitution, and use of any fonts embedded in the document)

This document focuses primarily on docx4j, but the general principles are equally applicable to pptx4j and xlsx4j.

Is docx4j for you?

Docx4j is for processing docx documents (and pptx presentations and xlsx spreadsheets) in Java.

It isn't for old binary (.doc) files. If you wish to invest your effort around docx (as is wise), but you also need to be able to handle old doc files, see further below for your options.

Nor is it for RTF files.

GraalVM

Programs based on docx4j can be converted to a Graal native image, and run "serverless" on AWS Lambda.

docx4j.NET

If you want to process docx/pptx/xlsx on the .NET platform, you should consider NPOI or Microsoft's OpenXML SDK. That said, docx4j can be used in a .NET environment via IKVM, and there are several reasons you might wish to do this:

- Where you need docx4j's capabilities, for example:
  - XHTML import/export/roundtrip
  - PDF export
  - OpenDoPE processing
- Capabilities provided by docx4j enterprise edition (as to which see above)
- Where you need to work in both Java and .NET, and want to use a single API in both environments
- Where you need the source code (Microsoft doesn't provide that)

You can use docx4j.NET and the OpenXML SDK together; see InteropDocx

As on the Java platform, docx4j.NET comes in community and commercial editions.

See https://www.nuget.org/packages/docx4j.NET/

What Word documents does it support?

Docx4j can read/write docx documents created by or for Word 2007 or later, plus earlier versions which have the compatibility pack installed. (Same goes for xlsx spreadsheets and pptx presentations).

Most docx files in the wild use the so called "transitional" namespace http://schemas.openxmlformats.org/officeDocument/2006. Office 2013 introduced the option of using the "strict" namespace http://purl.oclc.org/ooxml/officeDocument; docx4j (from 11.5.9) can import these. A strict package is converted as docx4j reads it, so what docx4j writes is always transitional: strict in, transitional out.

The relevant parts of docx4j are generated from the ECMA schemas, with the addition of the key Microsoft proprietary extensions. For unsupported extensions, docx4j gracefully degrades to the specified 2007 substitutes.

It is not really intended read/write Word 2003 XML documents, although `package org.docx4j.convert.in.word2003xml` is a proof of concept of importing such documents.

For more information, please see ***Specification versions*** below.

Handling legacy binary .doc files

An effective approach is to use LibreOffice or OpenOffice (via jodconverter) to convert the doc to docx, which docx4j can then process. If you need to return a binary .doc, LibreOffice or OpenOffice/jodconverter can convert the docx back to .doc.

With 8.2.0, docx4j can also convert binary .doc or RTF to docx, using Microsoft Word courtesy of documents4j. The sub-projects docx4j-documents4j-local and docx4j-documents4j-remote provide an interface to documents4j which is convenient for docx4j users.

A word about Jaxb

docx4j uses JAXB to marshall and unmarshall the XML parts in a docx/pptx/xlsx.

Docx4j supports 2 major JAXB implementations:

- the Sun/Oracle/"Reference" implementation; to use this you need docx4j-JAXB-ReferenceImpl

  You can also use the JAXB reference implementation (eg v2.2.4). If you want to use that in preference to the version included in the JDK, do so using the endorsed directory mechanism.

- Moxy. To use this, you need docx4j-JAXB-MOXy.

There is also:

- the JAXB in Java 8 implementation; to use this, you need the docx4j-JAXB-Internal jar. You can also use this with Java 9. But not Java 11, since Java 11 does not ship JAXB anymore.

- IBM's (in WebSphere). By default, WebSphere uses com.ibm.xml.xlxp2.jaxb, which has the concept of fallback/ MarshallerProxy. The actual implementation it uses is in com.ibm.jaxb.tools.jar.

This table shows which docx4j versions align with JAXB spec versions:

JAXB version	Namespace	Docx4j version

JAXB 4.0	jakarta.xml.bind	Docx4j 17.0.x Docx4j 11.5.x
JAXB 3.0	jakarta.xml.bind	Docx4j 11.4.x
JAXB 2.x	javax.xml.bind	Docx4j to 11.3.2 Docx4j 8.x

Using docx4j via Maven

docx4j is in Maven Central. For Maven users, this makes it really easy to get going with docx4j.

To use docx4j 11.4 or later, ensure any code references **jakarta.xml.bind** (not javax.xml.bind), and add **one and only one** of the following to your project:

```
<!-- use the JAXB Reference Implementation -->
<dependency>
        <groupId>org.docx4j</groupId>
        <artifactId>docx4j-JAXB-ReferenceImpl</artifactId>
        <version>17.3.6</version>
</dependency>

<!-- use the MOXy JAXB implementation -->
<dependency>
        <groupId>org.docx4j</groupId>
        <artifactId>docx4j-JAXB-MOXy</artifactId>
        <version>17.3.6</version>
</dependency>
```

The blog entry hello-maven-centrals [needs to be updated per above] shows you what to do, starting with a fresh OS (Win 7 is used, but these steps would work equally well on OSX or Linux).

Using docx4j bundles

If you want docx4j as one file, with nothing to resolve: from 17.0.4, docx4j-bundle is published to Maven Central as a single shaded fat jar, and from 17.3.4 a second jar, docx4j-bundle-extras, goes beside it for PDF output. They are for a classpath (a script, JPype from Python, a tool that ships one file), not for the module path: their module descriptors are stripped.

docx4j-bundle holds docx4j-core, the JAXB reference implementation runtime, docx4j-digsig, docx4j-markdown and docx4j-diffx, with all their dependencies. Its published pom declares no dependencies at all, so Maven resolves nothing else. The slf4j API is inside; a logging provider is not (see slf4j, below). With it alone you can load, create, edit and save docx, pptx and xlsx, bind data, extract text, export Markdown and HTML, sign documents, compare two documents, and create and edit charts.

docx4j-bundle-extras holds what PDF output needs: docx4j-export-fo, docx4j-chart-render (which draws charts, in PDF and HTML output), docx4j's FO renderer (a fork of Apache FOP), jaxb-xslfo, Batik, JEuclid and the font modules export-fo depends on (croscore, crosextra, symbol). It holds nothing the base jar has, so alone it does nothing: beside docx4j-bundle of the same version, Docx4J.toPDF works and charts are drawn. Do not put Apache FOP's own jars beside it: the extras carry org.apache.fop, and docx4j warns when both are on the classpath.

With Maven, depend on the extras and the base jar comes with it (its pom names docx4j-bundle as its one dependency):

```
<dependency>
        <groupId>org.docx4j</groupId>
        <artifactId>docx4j-bundle-extras</artifactId>
        <version>17.3.6</version>
</dependency>
```

or on docx4j-bundle alone if you do not need PDF. Do not mix a bundle with the ordinary artifacts (docx4j-core, docx4j-JAXB-ReferenceImpl, docx4j-export-fo and so on): every class would be on the classpath twice.

Not in either bundle: docx4j-ImportXHTML (LGPL), and the PDF converters that drive Word (documents4j, Microsoft Graph). How the bundles are built, and the checks run on them before a release, are in docx4j-bundle/design-rationale.md in the source tree.

Using docx4j binaries

If Maven (or Gradle) is not for you, the binaries are the two bundle jars described above, downloaded from Maven Central: docx4j-bundle-<version>.jar from https://repo1.maven.org/maven2/org/docx4j/docx4j-bundle/ and, for PDF output, docx4j-bundle-extras-<version>.jar from the directory beside it. Put them on your classpath with a logging provider (see slf4j, below). The zip distributions (docx4j-community, the two JAXB zips and the samples zips) end at 17.3.3; the sample sources and their documents are in the docx4j-samples-* modules on GitHub.

docx4j-bundle carries the JAXB reference implementation. MOXy users are the one group the bundles leave out: take the ordinary jars instead, docx4j-core and docx4j-JAXB-MOXy with their dependencies, either through a throwaway pom and `mvn dependency:copy-dependencies -DoutputDirectory=libs`, or jar by jar from Central's directory listing (every artifact is a URL under https://repo1.maven.org/maven2/org/docx4j/). The same gets you anything not in a bundle: docx4j-ImportXHTML, the documents4j and Microsoft Graph converters.

docx4j dependencies

slf4j

To do anything with docx4j, you need **slf4j** on your classpath. As the slf4j website puts it:

> The Simple Logging Facade for Java (SLF4J) serves as a simple facade or abstraction for various logging frameworks (e.g. java.util.logging, logback, log4j) allowing the end user to plug in the desired logging framework at *deployment* time.

So you need the slf4j api jar on your classpath (which Maven should do for you automatically):

```
<dependency>
  <groupId>org.slf4j</groupId>
  <artifactId>slf4j-api</artifactId>
</dependency>
```

For anything to be logged, you need a logging implementation. Here we assume you will use logback as your implementation:

```
<dependency>
  <groupId> ch.qos.logback </groupId>
  <artifactId> logback-classic </artifactId>
  <version>${version.logback-classic}</version>
</dependency>
```

For docx4j v11.4 on, the version property should be:

```
<version.logback-classic>1.5.19</version.logback-classic>
```

For docx4j 8.3.8, use `logback-classic 1.2.10.`

A logback.xml config file may be found at https://github.com/plutext/docx4j/blob/VERSION_17_2_1/docx4j-samples-resources/src/main/resources/logback.xml. Put that on your classpath.

See for example https://github.com/plutext/docx4j/blob/master/docx4j-samples-docx4j/pom.xml#L67

slf4j and docx4j-bundle

docx4j-bundle (and docx4j-bundle-extras beside it) is a different case: the slf4j API travels inside the jar, and its published pom declares no dependencies, so nothing pulls a logging provider in for you. There is deliberately no provider in the jar. A library should depend on the slf4j API only, and shading a provider into a fat jar would take over the logging of whatever application loads it. So with the bundle alone, slf4j prints one line, "No SLF4J providers were found", and logs nothing. To see docx4j's logging, put one

provider on the classpath beside the bundle: logback-classic (with the logback.xml above) or slf4j-simple. For deliberate silence, slf4j-nop removes the warning line too. If your application already has slf4j-api on its classpath, there are two copies of the `org.slf4j` classes and the first wins; that is harmless when yours is 2.x. The one combination that breaks is an application still on slf4j 1.7 with a 1.7 binding: the 2.x API inside the bundle ignores 1.x bindings, so move to a 2.x provider.

other dependencies

Depending what you want to do, the other dependencies will be required.

Best practice is to include all dependencies on your class path, and be done with it.

In your development environment, you can do this using Maven, or by physically copying them all to your classpath.

For your deployment environment, your build process ought to be set up to do this for you.

Docx4j source code

Docx4j source is on GitHub at https://github.com/plutext/docx4j .

We accept pull requests; pull requests are presumed to be contributions under ASLv2 per our contributor agreement.

See docx4j-from-github-in-eclipse for details.

Source code can also be downloaded from Maven Central (search for docx4j at search.maven.org).

Javadoc

Javadoc can be downloaded from Maven Central (search for docx4j at search.maven.org), but you'll find the source code much more useful! See above.

Building docx4j from source

Get the source code from GitHub (see above), then… (you probably want to skip down to the next page, to get it working in Eclipse).

docx4j builds on Linux, macOS and Windows (from 17.0.5).

Command line -via Maven

```
export MAVEN_OPTS=-Xmx512m
mvn install  -Dgpg.skip=true
```

Eclipse

See docx4j-from-github-in-eclipse.

Not working?

Enable Maven (make sure you have Maven and its plugin installed - see Prerequisites above):

- with Eclipse Indigo
  - Right click on the project
  - Click "Configure > Convert to Maven Project"

compiler version & system library:

- Right click on the project (or Alt-Enter)
- Choose "Java Compiler", then set JDK compliance to 1.8
- Choose "Java Build Path", and check you are using 1.8 "JRE System Library". If not, remove, then click "Add Library"

The project should now be working in Eclipse without errors[2].

Using a different IDE?

Please post setup instructions in the forum, or as a wiki page on GitHub. Thanks!

Open an existing docx/pptx/xlsx document

`org.docx4j.openpackaging.packages.`**`WordprocessingMLPackage`** represents a docx document.

To load a document or “Flat OPC” XML file, all you have to do is:

```
WordprocessingMLPackage wordMLPackage =
      WordprocessingMLPackage.load(new java.io.File(inputfilepath));
```

You can use the façade:

```
WordprocessingMLPackage wordMLPackage =
      Docx4J.load(new java.io.File(inputfilepath));
```

[2] If you get the error 'Access restriction: The type is not accessible due to restriction on required library rt.jar' (perhaps using some combination of Eclipse 3.4 and/or JDK 6 update 10?), you need to go into the Build Path for the project, Libraries tab, select the JRE System Library, and add an access rule, "Accessible, **".

which does the same thing under the covers.

There are similar signatures to load from an input stream.

You can then get the main document part (word/document.xml):

```
MainDocumentPart documentPart = wordMLPackage.getMainDocumentPart();
```

After that, you can manipulate its contents.

A similar approach works for pptx files:

```
PresentationMLPackage presentationMLPackage =
       (PresentationMLPackage)OpcPackage.load(new java.io.File(inputfilepath));
```

And similarly for xlsx files.

Damaged packages

From 17.3.6, a package with one of the following faults, each of which Word opens only through its repair prompt, is refused:

- a zip holding two entries of one name,
- more than one main document relationship, and
- a relationships part in the wrong namespace.

A fourth, an External main document relationship beside an internal one, is refused too; Word won't open that at all. The load throws a Docx4JException whose message begins "Refused:" and names what is wrong.

To read such a package as Word's repair gives it, answer the prompt in advance:

```
WordprocessingMLPackage wordMLPackage =
      WordprocessingMLPackage.load(new java.io.File(inputfilepath),
            new LoadOptions().repairMode(RepairMode.WORD));
```

or set docx4j.openpackaging.load.repair=word in docx4j.properties (the default is none). RepairMode.ALL adds docx4j's own repairs to Word's, of shapes Word won't open: for the External main document relationship, the internal part is read and the URL is never fetched. A package docx4j has no repair for is still refused. Docx4J.load and OpcPackage.load take the same LoadOptions (in org.docx4j.openpackaging.io3).

Afterwards, OpcPackage.getLoadFindings() lists what the load repaired or read around, each finding with its kind (package.duplicate_entry, say), the part or entry it concerns, and a detail; the list is empty for an ordinary package.

Also from 17.3.6, a part that can't be read no longer aborts the load. A relationships part that breaks off keeps the relationships before the break and is reported as a load finding (part.not_read); saving that

package is refused unless it was loaded with a repair mode, since the save would drop whatever the lost relationships named. A custom XML part that can't be read is treated as absent.

OpenXML concepts

To do anything much beyond this, you need to have an understanding of basic WordML concepts (or PresentationML or SpreadsheetML).

According to the Microsoft Open Packaging spec, each docx document is made up of a number of “Part” files, zipped up.

An easy way to get an understanding of this is to unzip a docx/pptx/xlsx using your favourite zip utility. Even easier is to visit http://webapp.docx4java.org and explore your file using “PartsList”. You can also generate code that way.

A Part is usually XML, but might not be (an image part, for example, isn't).

The parts form a tree. If a part has child parts, it must have a relationships part which identifies these.

The part which contains the main text of the document is the Main Document Part. Each Part has a name. The name of the Main Document Part is usually "/word/document.xml".

If the document has a header, then the main document part woud have a header child part, and this would be described in the main document part's relationships (part).

Similarly for any images. To see the structure of any given document, upload it to the PartsList webapp, or run the "Parts List" sample (see further below).

An introduction to WordML is beyond the scope of this document. You can find a very readable introduction in 1st edition Part 3 (Primer) at http://www.ecma-international.org/publications/standards/Ecma-376.htm or http://www.ecma-international.org/news/TC45_current_work/TC45_available_docs.htm (a better link for the 1st edition (Dec 2006), since its not zipped up).

See also the free "Open XML Explained" ebook by Wouter Van Vugt.

Specification versions

From Wikipedia:

> The Office Open XML file formats were standardised between December 2006 and November 2008,
>
> > first by the Ecma International consortium (where they became **ECMA-376**),

and subsequently .. by the ISO/IEC's Joint Technical Committee 1 (where they became **ISO/IEC 29500:2008**).

The Ecma-376.htm link also contains the 2nd edition documents (of Dec 2008), which are "technically aligned with ISO/IEC 29500".

Office 2007 SP2 implements ECMA-376 1st Edition[3]; this is what docx4j started with

ISO/IEC 29500 (ECMA-376 2nd Edition) has *Strict* and *Transitional* conformance classes. Office 2010 supports[4] transitional, and also has read only support for strict. docx4j imports strict (since 11.5.9): each part is converted to the transitional namespaces the first time it is read, and every part is converted before the package is saved, so a package docx4j saves is a transitional one - strict in, transitional out. A strict document you anonymise, convert or merely load and save therefore comes back transitional.

docx4j started with ECMA-376 1st Edition. Where appropriate later versions of the schemas are used. docx4j 3.0 uses MathML 2ed, PresentationML 2ed, and SpreadsheemML 4ed transitional.

docx4j can open documents which contain Word 2010 and later content. The key extensions are bound (the w14, w15 and w16 namespaces, wps and wpg shapes, a14 drawing), and what it does not bind is preserved wherever the schema admits it.

Markup compatibility (mc:AlternateContent). Word writes some content twice: an mc:Choice for a reader which understands the newer namespace, and an mc:Fallback for one which does not. For example, a text box is a wps shape with a VML fallback; an equation on a PowerPoint slide is an a14 shape with a picture fallback.

docx4j has long kept mc:AlternateContent in some specific places. Since docx4j 17.2.0, this has extended to an element in run or paragraph content, and from 17.3.4 (CR-051) the element is admitted everywhere the schema allows it, block, row and cell level included: in the body, headers, footers, footnotes, comments, text boxes, content controls, tables, rows and cells.

What a load does with those is set by the **docx4j.jaxb.mc.onLoad** property:

- **word**, the default in 17.3.x, resolves each one as Word reads it (Word generally keeps it, but does resolve some instances which it would not write itself);
- **preserve** keeps each one whole in the tree, which the anonymiser, diffx and an editor that saves ask for.

The mode can also be given per load (WordprocessingMLPackage.load(.., McLoadMode), Docx4J.load) or per package (OpcPackage.setMcLoadMode). From 17.4.0 the default becomes preserve, with Word's view still what a read gives; set the property to choose now.

[3] http://blogs.msdn.com/b/dmahugh/archive/2009/01/16/ecma-376-implementation-notes-for-office-2007-sp2.aspx
[4] http://blogs.msdn.com/b/dmahugh/archive/2010/04/06/office-s-support-for-iso-iec-29500-strict.aspx

When docx4j draws, it takes one branch: the first mc:Choice whose Requires prefixes are all named in the **docx4j.jaxb.mc.preferChoice** property, otherwise the mc:Fallback. The property is empty by default, so docx4j draws the fallback (what the producer wrote for a reader which understands nothing extra); set it, for example to wps, or to a14 for PowerPoint equations, to draw the choice instead. The rule lives in org.docx4j.jaxb.McSelection.

When docx4j reads text (the text model, the Markdown export, and a TraversalUtil walk by default) it takes, from 17.3.4, the branch ECMA-376 Part 3 prescribes: the first mc:Choice whose Requires namespaces are all ones docx4j can read, from the published list org/docx4j/jaxb/understood-namespaces.txt, otherwise the mc:Fallback.

A branch docx4j can read is not always one it can draw: it reads a wps text box from the Choice, and draws its VML fallback. McSelection.selectedBranch(McPurpose, AlternateContent) gives either.

Where a producer has written the element somewhere the schema does not admit it (Word's own output has not been seen to), the load-time preprocessor resolves that one element to the branch docx4j draws, and logs a warning naming the parent.

Architecture

Docx4j has 3 layers:

1. **`org.docx4j.openpackaging`**

   OpenPackaging handles things at the Open Packaging Conventions level.

   It includes objects corresponding to each Office file type:

docx	org.docx4j.openpackaging.packages.**WordprocessingMLPackage**
pptx	org.docx4j.openpackaging.packages.**PresentationMLPackage**
xlsx	org.docx4j.openpackaging.packages.**SpreadsheetMLPackage**

   and is responsible for unzipping the file into a set of objects inheriting from Part;

   `openpackaging` also includes functionalitiy allowing parts to be added/deleted; saving the docx/pptx/xlsx etc

   This layer is based originally on OpenXML4J (which is also used by Apache POI).

2. Parts are generally subclasses of **`org.docx4j.openpackaging.parts.JaxbXmlPart`**

   This (the **jaxb content tree**) is the second level of the three layered model. To explore these first two layers for a given document, upload it to the PartsList webapp.

   Parts are arranged in a tree. If a part has descendants, it will have a **`org.docx4j.openpackaging.parts.relationships.RelationshipsPart`** which identifies those descendant parts.

   A JaxbXmlPart has a content tree:

```
public Object getJaxbElement() {
	return jaxbElement;
}

public void setJaxbElement(Object jaxbElement) {
	this.jaxbElement = jaxbElement;
}
```

   Most parts (including MainDocumentPart, styles, headers/footers, comments, endnotes/footnotes) use **`org.docx4j.wml`** (WordprocessingML); wml references **`org.docx4j.dml`** (DrawingML) as necessary.

   These classes were generated from the Open XML schemas

3. **`org.docx4j.model`**

   This package builds on the lower two layers to provide extra functionality, and is being progressively further developed.

Jaxb: marshalling and unmarshalling

Docx4j contains a class representing each part. For example, there is a `MainDocumentPart` class. XML parts inherit from `JaxbXmlPart`, which contains a member called **`jaxbElement`**. When you want to work with the contents of a part, you work with its jaxbElement by using the **`get|setContents`** method.

When you open a docx document using docx4j, docx4j automatically ***unmarshals*** the contents of each XML part to a strongly-type Java object tree (the jaxbElement). Actually, docx4j 3.0 is lazy; it only does this when first needed.

Similarly, if/when you tell docx4j to save these Java objects as a docx, docx4j automatically ***marshals*** the jaxbElement in each Part.

Sometimes you will want to marshal or unmarshal things yourself. The class **`org.docx4j.jaxb.Context`** defines all the JAXBContexts used in docx4j. Here is representative (non-exhaustive) content:

`Jc`	`org.docx4j.wml`
	`org.docx4j.dml`
	`org.docx4j.dml.picture`
	`org.docx4j.dml.wordprocessingDrawing`
	`org.docx4j.vml`
	`org.docx4j.vml.officedrawing`
	`org.docx4j.math`

`jcThemePart`	`org.docx4j.dml`

`jcDocPropsCore`	`org.docx4j.docProps.core`
	`org.docx4j.docProps.core.dc.elements`
	`org.docx4j.docProps.core.dc.terms`

`jcDocPropsCustom`	`org.docx4j.docProps.custom`
`jcDocPropsExtended`	`org.docx4j.docProps.extended`
`jcXmlPackage`	`org.docx4j.xmlPackage`
`jcRelationships`	`org.docx4j.relationships`
`jcCustomXmlProperties`	`org.docx4j.customXmlProperties`
`jcContentTypes`	`org.docx4j.openpackaging.contenttype`

`jcPML`	`org.docx4j.pml`
	`org.docx4j.dml`
	`org.docx4j.dml.picture`

You'll find XmlUtils.marshalToString very useful as you put your code together. With this, you can easily output the content of a JAXB object, to see what XML it represents.

Parts List

To get a better understanding of how docx4j works – and the structure of a docx document – you can run the PartsList sample on a docx (or a pptx or xlsx). If you do, it will list the hierarchy of parts used in that package. It will tell you which class is used to represent each part, and where that part is a JaxbXmlPart, it will also tell you what class the `jaxbElement` is.

So it's a bit like unzipping the docx/pptx/xlsx file, but it tells you what Java objects are being used for each part.

A more fully featured tool is the PartsList online webapp. With this, you can:

- browse through the package,
- look up what elements mean in the spec, and
- generate code.

Alternatively, you can install the Docx4j Helper Word AddIn, to generate code from within Word. See also forum http://www.docx4java.org/forums/docx4jhelper-addin-f30/

You can run PartsList locally from a command line:

```
java -cp docx4j-3.0.1.jar:log4j-1.2.17.jar;slf4j-api-1.7.5.jar;slf4j-log4j12-1.7.5.jar
        org.docx4j.samples. PartsList [input.docx]
```

though I always find it easier to run it from my IDE. Example output:

```
Part /_rels/.rels [org.docx4j.openpackaging.parts.relationships.RelationshipsPart]
  containing JaxbElement:org.docx4j.relationships.Relationships

       Part /docProps/app.xml [org.docx4j.openpackaging.parts.DocPropsExtendedPart]
         containing JaxbElement:org.docx4j.docProps.extended.Properties

       Part /docProps/core.xml [org.docx4j.openpackaging.parts.DocPropsCorePart]
         containing JaxbElement:org.docx4j.docProps.core.CoreProperties

       Part /word/document.xml [org.docx4j.openpackaging.parts.WordprocessingML.MainDocumentPart]
         containing JaxbElement:org.docx4j.wml.Document

             Part /word/settings.xml
             [org.docx4j.openpackaging.parts.WordprocessingML.DocumentSettingsPart]
               containing JaxbElement:org.docx4j.wml.CTSettings

             Part /word/styles.xml
             [org.docx4j.openpackaging.parts.WordprocessingML.StyleDefinitionsPart]
               containing JaxbElement:org.docx4j.wml.Styles

             Part /word/media/image1.jpeg
             [org.docx4j.openpackaging.parts.WordprocessingML.ImageJpegPart]
```

docx4j includes convenience methods to make it easy to access commonly used parts. These include,

on the package:

```
public MainDocumentPart getMainDocumentPart()

public DocPropsCorePart getDocPropsCorePart()
public DocPropsExtendedPart getDocPropsExtendedPart()
public DocPropsCustomPart getDocPropsCustomPart()
```

on the document part:

```
public StyleDefinitionsPart getStyleDefinitionsPart()
public NumberingDefinitionsPart getNumberingDefinitionsPart()
public ThemePart getThemePart()
public FontTablePart getFontTablePart()

public CommentsPart getCommentsPart()

public EndnotesPart getEndNotesPart()
public FootnotesPart getFootnotesPart()

public DocumentSettingsPart getDocumentSettingsPart()
public WebSettingsPart getWebSettingsPart()
```

If a part points to any other parts, it will have a relationships part listing these other parts.

```
RelationshipsPart rp = part.getRelationshipsPart();
```

You can access those, and from there, get the part you want:

```
for ( Relationship r : rp.getRelationships().getRelationship() ) {

       log.info("\nFor Relationship Id=" + r.getId()
                    + " Source is " + rp.getSourceP().getPartName()
```

```
                        + ", Target is " + r.getTarget()
                        + " type " + r.getType() + "\n");

            Part part = rp.getPart(r);
        }
```

That gives access to just the parts this part points to. `RelationshipsPart` contains various useful utility methods, for example:

```
        /** Gets a loaded Part by its id */
        public Part getPart(String id)

        public Part getPart(Relationship r ) {
```

The `RelationshipsPart` is the key player when it comes to adding/removing images and other parts from your document.

There is also a list of **all** parts, in the package object:

```
        Parts parts = wordMLPackage.getParts();
```

The Parts object encapsulates a map of parts, keyed by PartName, but you generally shouldn't add/remove things here directly!

To add a part, see the section Adding a Part below.

MainDocumentPart

The text of the document is to be found in the main document part.

Its XML will look something like:

```
<w:document xmlns:w="http://schemas.openxmlformats.org/wordprocessingml/2006/main"
>
  <w:body>
    <w:p >
      <w:pPr>
        <w:pStyle w:val="Heading1"/>
      </w:pPr>
      <w:r>
        <w:t>Hello World</w:t>
      </w:r>
    </w:p>
    :
    <w:sectPr >
      <w:pgSz w:w="12240" w:h="15840"/>
      <w:pgMar w:top="1440" w:right="1440" w:bottom="1440" w:left="1440"
w:header="708" w:footer="708" w:gutter="0"/>
    </w:sectPr>
  </w:body>
```

```
</w:document>
```

Given:

```
WordprocessingMLPackage wordMLPackage
```

you can access:

```
MainDocumentPart documentPart = wordMLPackage.getMainDocumentPart();
```

Classically, you'd then do:

```
org.docx4j.wml.Document wmlDocumentEl
      = (org.docx4j.wml.Document) documentPart.getJaxbElement();
Body body = wmlDocumentEl.getBody();
```

But you can skip some of that with:

```
/**
 * Convenience method to getJaxbElement().getBody().getContent()
 */
public List<Object> getContent()
```

A paragraph is org.docx4j.wml.P; a paragraph is basically made up of runs of text.

```
@XmlRootElement(name = "p")
public class P implements Child, ContentAccessor
```

The `ContentAccessor` interface is simply:

```
/**
 * @since 2.7
 */
public interface ContentAccessor {

    public List<Object> getContent();

}
```

it is implemented by a number of objects, including:

Body	w:body	document body
P	w:p	paragraph
R	w:r	run
Tbl Tr Tc	w:tbl w:tr w:tc	table table row table cell
SdtBlock SdtRun	w:sdt w:sdt	content controls; see the method `getSdtContent()`

CTSdtRow CTSdtCell	w:sdt w:sdt	

As well as

- Hdr, Ftr

Content is generally stored in a plain old Java List. So there are familiar methods for inserting content at the end of the list, or other location in it.

Read on for how to add text etc.

Samples

The modules:

- docx4j-samples-docx4j
- docx4j-samples-docx-diffx
- docx4j-samples-docx-export-fo
- docx4j-samples-pptx4j
- docx4j-samples-xlsx4j
- docx4j-samples-glox4

contains examples of how to do things with docx4j. You can find them in the GitHub repo.

The docx4j samples include:

Basics

- CreateWordprocessingMLDocument
- DisplayMainDocumentPartXml
- OpenAndSaveRoundTripTest
- PartsList

Navigating the document body

- OpenMainDocumentAndTraverse
- XPathQuery

Output/Transformation

- ConvertOutHtml
- ConvertOutPDF

Import (X)HTML

- AltChunkXHTMLRoundTrip
- AltChunkAddOfTypeHtml
- ConvertInXHTMLDocument
- ConvertInXHTMLFragment

Image handling

- ImageAdd
- ImageConvertEmbeddedToLinked

Part Handling

- PartCopy
- PartLoadFromFileSystem
- PartsList
- PartsStrip

Document generation/document assembly using content controls

- ContentControlsAddCustomXmlDataStoragePart
- ContentControlsXmlEdit
- ContentControlsApplyBindings
- ContentControlBindingExtensions
- ContentControlsPartsInfo
- AltChunkAddOfTypeDocx
- VariableReplace (not recommended)

Specific docx features

- BookmarkAdd
- CommentsSample
- HeaderFooterCreate
- HeaderFooterList
- HyperlinkTest
- NumberingRestart
- SubDocument
- TableOfContentsAdd
- TemplateAttach (attach your.dotx)

Miscellaneous

- CompareDocuments (in docx4j-samples-docx-diffx)
- DocProps
- Filter (remove proof errors, w:rsid)
- MergeDocx
- UnmarshallFromTemplate

Flat OPC XML

- ConvertOutFlatOpenPackage
- ConvertInFlatOpenPackage

Creating a new docx

To create a new docx:

```
    // Create the package
    WordprocessingMLPackage wordMLPackage =
Wordprocessing MLPackage.createPackage();

    // Save it
    wordMLPackage.save(new java.io.File("helloworld.docx") );
```

That's it.

There's a sample you can try locally from a command line:

```
java -cp docx4j-3.0.1.jar:log4j-1.2.17.jar;slf4j-api-1.7.5.jar;slf4j-log4j12-1.7.5.jar
        org.docx4j.samples. CreateDocx [input.docx]
```

`createPackage()` is a convenience method, which does:

```
    // Create the package
    WordprocessingMLPackage wordMLPackage = new WordprocessingMLPackage();

    // Create the main document part (word/document.xml)
    MainDocumentPart wordDocumentPart = new MainDocumentPart();

    // Create main document part content
    ObjectFactory factory = Context.getWmlObjectFactory();
    org.docx4j.wml.Body body = factory .createBody();
    org.docx4j.wml.Document wmlDocumentEl = factory .createDocument();
    wmlDocumentEl.setBody(body);

    // Put the content in the part
    wordDocumentPart.setJaxbElement(wmlDocumentEl);

    // Add the main document part to the package relationships
    // (creating it if necessary)
    wmlPack.addTargetPart(wordDocumentPart);
```

docx4j.properties

Here is a sample short docx4j.properties file (a complete one may be copied from https://github.com/plutext/docx4j/blob/master/docx4j-samples-resources/src/main/resources/docx4j.properties):

```
    # Page size: use a value from org.docx4j.model.structure.PageSizePaper enum
    # eg A4, LETTER
    docx4j.PageSize=LETTER
    # Page size: use a value from org.docx4j.model.structure.MarginsWellKnown enum
    docx4j.PageMargins=NORMAL
    docx4j.PageOrientationLandscape=false

    # Page size: use a value from org.pptx4j.model.SlideSizesWellKnown enum
    # eg A4, LETTER
    pptx4j.PageSize=LETTER
```

```
pptx4j.PageOrientationLandscape=false

# These will be injected into docProps/app.xml
# if App.Write=true
docx4j.App.write=true
docx4j.Application=docx4j
docx4j.AppVersion=2.7
# of the form XX.YYYY where X and Y represent numerical values

# These will be injected into docProps/core.xml
docx4j.dc.write=true
docx4j.dc.creator.value=docx4j
docx4j.dc.lastModifiedBy.value=docx4j
# dcterms:created (a new document's) and dcterms:modified set to the time of the save
(since 17.3.3)
docx4j.dcterms.write=false

#
#docx4j.McPreprocessor=true

# If you haven't configured log4j yourself
# docx4j will autoconfigure it.  Set this to true to disable that
docx4j.Log4j.Configurator.disabled=false
```

The page size, margin & orientation values are used when new documents are created; naturally they don't affect an existing document you open with docx4j.

If no docx4j.properties file is found on your class path, docx4j has hard coded defaults.

Adding a paragraph of text

`MainDocumentPart` contains a method:

```
public org.docx4j.wml.P addStyledParagraphOfText(String styleId, String text)
```

You can use that method to add a paragraph using the specified style.

The XML we are looking to create will be something like:

```
<w:p  xmlns:w="http://schemas.openxmlformats.org/wordprocessingml/2006/main">
    <w:r>
        <w:t>Hello world</w:t>
    </w:r>
</w:p>
```

`addStyledParagraphOfText` builds the object structure “the JAXB way”, and adds it to the document.

It is based on:

```
      public org.docx4j.wml.P createParagraphOfText(String simpleText) {

            org.docx4j.wml.ObjectFactory factory =
Context.getWmlObjectFactory();
            org.docx4j.wml.P  para = factory.createP();

            if (simpleText!=null) {
                  org.docx4j.wml.Text  t = factory.createText();
                  t.setValue(simpleText);
```

```
                org.docx4j.wml.R  run = factory.createR();
                run.getContent().add(t); // ContentAccessor

                para.getContent().add(run); // ContentAccessor
        }

        return para;
    }
```

Notice that the paragraph, the run, and indeed the Body, all implement the `ContentAccessor` interface:

```
/**
 * @since 2.7
 */
public interface ContentAccessor {

    public List<Object> getContent();

}
```

The add method adds the content at the end of the document. If you want to insert it somewhere else, you could use something like:

```
    public org.docx4j.wml.P addParaAtIndex(MainDocumentPart mdp,
                String simpleText, int index) {

        org.docx4j.wml.ObjectFactory factory = Context.getWmlObjectFactory();
        org.docx4j.wml.P para = factory.createP();

        if (simpleText != null) {
                org.docx4j.wml.Text t = factory.createText();
                t.setValue(simpleText);

                org.docx4j.wml.R run = factory.createR();
                run.getContent().add(t);

                para.getContent().add(run);
        }

        mdp.getContent().add(index, para);

        return para;
    }
```

Alternatively, you can create the paragraph by marshalling XML:

```
    // Assuming String xml contains the XML above
    org.docx4j.wml.P  para = XmlUtils.unmarshalString(xml);
```

For this to work, you need to ensure that all namespaces are declared properly in the string.

See further below for adding images, and tables.

General strategy/approach for creating stuff

The first thing you need to know is what the XML you are trying to create looks like.

To figure this out, start with a docx that contains the construct (create it in Word if necessary).

Now look at its XML. Choices:

- You can unzip it to do this blagh
- upload it to the PartsList online webapp (which can also generate code for you)
- save it as Flat OPC XML from Word (or use the `ExportInPackageFormat` sample), so you have just a single XML file which you don't need to unzip
- you can use the `DisplayMainDocumentPartXml` to get it
- you can open it with docx4all, and look at the source view
- on Windows, if you have Visual Studio 2010, you can drag the docx onto it
- if you use Google's Chrome web browser, try **OOXML Viewer for Chrome**.

Now you are ready to create this XML using JAXB. There are 2 basic ways.

The classic JAXB way is to use the ObjectFactory's .createX methods. For example:

```
ObjectFactory factory = Context.getWmlObjectFactory();
P p = factory.createP();
```

The challenge with this is to know what object it is you are trying to create. To find this out, the easiest way by far is to use the PartsList online webapp. Alternatively, you could run `OpenMainDocumentAndTraverse` on your document, or use Eclipse to search the relevant schema (in /xsd) or source code.

Here are the names for some common objects:

Object	XML element	docx4j class	Factory method
Document body	w:body	org.docx4j.wml.Body	factory.createBody();
Paragraph	w:p	org.docx4j.wml.P	factory.createP()
Paragraph props	w:pPr	org.docx4j.wml.PPr	factory.createPPr()
Run	w:r	org.docx4j.wml.R	factory.createR()
Run props	w:rPr	org.docx4j.wml.RPr	factory.createRPr()
Text	w:t	org.docx4j.wml.Text	factory.createText()
Table	w:tbl	org.docx4j.wml.Tbl	factory.createTbl()
Table row	w:tr	org.docx4j.wml.Tr	factory.createTr()
Table cell	w:tc	org.docx4j.wml.Tc	factory.createTc()
Drawing	w:drawing	org.docx4j.wml.Drawing	factory.createDrawing()
Page break	w:br	org.docx4j.wml.Br	factory.createBr()
Footnote or endnote ref	?	org.docx4j.wml.CTFtnEdnRef	factory.createCTFtnEdnRef()

An easier way to create stuff may be to just unmarshal the XML (eg a String representing a paragraph to be inserted into the document).

For example, given:

```
<w:p  xmlns:w="http://schemas.openxmlformats.org/wordprocessingml/2006/main">
    <w:r>
        <w:t>Hello world</w:t>
    </w:r>
</w:p>
```

you can simply:

```
    // Assuming String xml contains the XML above
    org.docx4j.wml.P  para = XmlUtils.unmarshalString(xml);
```

The PartsList online webapp can generate appropriate code for you, using both of these approaches. It also links to the Open XML spec documentation for the element.

Alternatively, you can install the Docx4j Helper Word AddIn, to generate code from within Word. See also forum http://www.docx4java.org/forums/docx4jhelper-addin-f30/

If you need to be explicit about the type, you can use:

```
  public static Object unmarshalString(String str, JAXBContext jc, Class
declaredType)
```

Formatting Properties

Usually you format the appearance of things via an object's properties element:

Object	Method
Paragraph	P.getPPr()
Run	R.getRPr()
Table	Tbl.getTblPr()
Table row	Tr.getTrPr()
Table cell	Tc.getTcPr()

In a docx, the appearance of text is basically determined by the style in the styles part which applies to it (styles can inherit from other styles), plus any direct formatting.

Docx4j contains code for working out the effective formatting, which is used in its PDF output.

In XHTML import, docx4j converts CSS into formatting properties.

Creating and adding a table

org.docx4j.model.table.TblFactory provides an easy way to create a simple table. For an example of its use, see the CreateWordprocessingMLDocument sample. If you want to add content, see ***General strategy/approach for creating stuff*** above. If you want format your table (make it prettier), see Formatting Properties immediately above.

Or you can use the PartsList online webapp to generate the code.

If you are looking to fill table rows with data, consider OpenDoPE content control data binding (in which you "repeat" a table row).

Selecting your insertion/editing point; accessing JAXB nodes via XPath

Sometimes, XPath is a succinct way to select the things you need to change.

You can use XPath to select JAXB nodes:

```
MainDocumentPart documentPart = wordMLPackage.getMainDocumentPart();
String xpath = "//w:p";
List<Object> list = documentPart.getJAXBNodesViaXPath(xpath, false);
```

These JAXB nodes are live, in the sense that if you change them, your document changes.

There are a few limitations however in the JAXB reference implementation:

- the xpath expressions are evaluated against the XML document as it was when first opened in docx4j. You can update the associated XML document once only, by passing true into `getJAXBNodesViaXPath`. Updating it again (with current JAXB 2.1.x or 2.2.x) will cause an error.
- For some documents, JAXB can't set up the XPath

If these limitations are causing you problems, try using MOXy as your JAXB implementation, or see Traversing immediately below for a different approach.

Traversing a document

OpenMainDocumentAndTraverse.java in the samples directory shows you how to traverse the JAXB representation of a docx.

This is an alternative to XSLT, which doesn't require marshalling to a DOM document and unmarshalling again.

The sample uses TraversalUtil, which is a general approach for traversing the JAXB object tree in the main document part. It can also be applied to headers, footers etc. TraversalUtil has an `interface Callback`, which you use to specify how you want to traverse the nodes, and what you want to do to them.

As noted earlier, many objects (eg the document body, a paragraph, a run), have a List containing their content. Traversal works by iterating over these lists.

Traversing is a very useful approach for finding and altering parts of the document.

For example, it is used in docx4j 2.8.0, to provide a way of producing HTML output without using XSLT/Xalan.

The org.docx4j.finders package contains classes which make it convenient to find various objects.

It is often superior to using XPath (owing to the limitations in the JAXB reference implementation noted above).

Note also, in `package org.docx4j.utils:`

```
/**
 * Use this if there is only a single object type (eg just P's)
 * you are interested in doing something with.
public class SingleTraversalUtilVisitorCallback
```

ImageConvertEmbeddedToLinked sample contains an example of the use of the above.

```
/**
 * Use this if there is more than one object type (eg Tables and
Paragraphs)
 * you are interested in doing something with during the traversal.
public class CompoundTraversalUtilVisitorCallback
```

mc:AlternateContent in a traversal. Since docx4j 17.2.0 a TraversalUtil walk visits one branch of each mc:AlternateContent by default (McMode.READ), so a text box's paragraphs are visited once, not once as the wps shape and again as its VML fallback. From 17.3.4 that branch is the one docx4j reads for text (see Markup compatibility, above); before, it was the branch docx4j draws, which a walk serving an output's layout asks for with McMode.DRAW.

A callback which edits the document (find and replace, field update, anything whose result must reach every reader) should ask for every branch with McMode.ALL, through the TraversalUtil constructor or visit overload which takes a mode, or CallbackImpl.setMcMode. Before 17.2.0 every walk saw every branch.

Adding a Part

What if you wanted to add a new styles part? Here's how:

```
// Create a styles part
StyleDefinitionsPart stylesPart = new StyleDefinitionsPart();

// Populate it with default styles
stylesPart.unmarshalDefaultStyles();

// Add the styles part to the main document part relationships
wordDocumentPart.addTargetPart(stylesPart);
```

You'd take the same approach to add a header or footer.

When you add a part this way, it is automatically added to the source part's relationships part.

Generally, you'll also need to add a reference to the part (using its relationship id) to the Main Document Part. This applies to images, headers and footers. (Comments, footnotes and endnotes are a bit different, in that what you add to the main document part are references to individual comments/footnotes/endnotes).

Importing XHTML

docx4j can convert XHTML content (paragraphs, tables, images — and, since 17.0.4, MathML, which becomes a native Word equation) into native WordML, reproducing much of the formatting.

XHTML Import functionality is a separate project on GitHub because its main dependency – Flying Saucer - is licensed under LGPL v2.1 (as opposed to ASL v2, which docx4j's other dependencies use).

If you want this functionality, you have to add these jars to your classpath.

A document's own `altChunk`s (HTML, XHTML or MHT content that Word converts on opening) are converted in place by `convertAltChunks()` on the main document part, a header or a footer, through the same importer. From 17.3.5 that conversion fetches nothing a chunk refers to, neither a stylesheet nor an image by URL or by local file, since a docx is untrusted input wherever a server converts it; an image not fetched is its alt text, or nothing. Set `docx4j.altchunk.html.fetch=true` in docx4j.properties to restore Word's fetching, or pass `convertAltChunks(true)` for one call.

See the samples at https://github.com/plutext/docx4j-ImportXHTML/tree/master/src/samples

Markdown import and export

New in 17.0.4, the docx4j-markdown module converts Markdown to docx, and docx to Markdown. The import (CommonMark plus the GFM extensions: tables, task lists, real footnotes, YAML front matter) produces a real Word document – actual heading/quote/code styles and real numbering, with no HTML detour. The export includes image extraction; from 17.3.4 it writes docx4j's text model (see Text extraction), so its text is the plain text's, in the same view, with tracked changes as CriticMarkup in the markup view (before 17.3.4, deletions were struck through).

TeX math is supported in both directions: $...$ and $$...$$ translate to native OMML equations, for a published LaTeX subset (fractions, scripts, radicals, n-ary operators with limits, delimiters, matrices, aligned equations and cases, accents, and more). An equation outside the subset never disappears silently: it falls back whole to its literal source, and is reported via an issue listener. Combined with the equation support in the HTML and PDF output (see below), this makes docx4j a clean pipeline for LLM output: markdown with math in, Word/HTML/PDF with real equations out.

To use it, add docx4j-markdown to your classpath, then use the facade methods Docx4J.fromMarkdown and Docx4J.toMarkdown (or MarkdownImporter / MarkdownExporter directly, for options). See the module README for details.

docx4j for AI agents (MCP)

If you would rather have an AI agent work with your docx files than write Java yourself, docx4j-mcp is a Model Context Protocol server which exposes docx4j's engine to Claude Desktop, Claude Code, and any other MCP client: reading, converting (Markdown, HTML, PDF) and filling Word documents. It is developed and released separately; see https://github.com/plutext/docx4j-mcp for setup and the current tool surface.

Using an LLM with docx4j

LLMs and coding agents (Claude Code, Copilot, and similar) are good at writing docx4j code, and you should feel free to use them. Two things help: docx4j's documentation is available in LLM-friendly form at https://www.docx4java.org/llms.txt, and the docx4j-samples-* modules give an agent working code to pattern-match against. The classic failure modes to watch for: javax.xml.bind imports (current docx4j uses jakarta.xml.bind – see the Jaxb section above), and invented APIs for merging documents (merging is a commercial extension; see Merging Documents and Presentations below).

The docx4j source tree is set up for AI-assisted development too: CLAUDE.md in the repository root (https://github.com/plutext/docx4j/blob/HEAD/CLAUDE.md) orients a coding agent – build commands, module map, architecture – and docs/developer/change-requests/ records the design history that gives an agent (or a human) context for non-trivial changes. Much of docx4j 17.0.x was built this way.

Contributions – including AI-assisted ones – are welcome. Please do submit issues (a small docx reproducing the problem is worth a thousand words) and pull requests. See CONTRIBUTING.md (https://github.com/plutext/docx4j/blob/HEAD/CONTRIBUTING.md) for the ground rules: DCO sign-off, and for AI assistance, that you have reviewed and can stand behind the code, and disclose the assistance with an Assisted-by: trailer.

And when you want to discuss something with a human: use GitHub discussions (https://github.com/plutext/docx4j/discussions) for questions and ideas, GitHub issues for bugs, or the docx4j forum at http://www.docx4java.org/forums/

Anonymising a document before you share it

The quickest way to get help with a problem – a layout difference, a document that won't open, a conversion that fails – is to share the document which shows it. If that document is confidential, anonymise it first. docx4j's anonymiser (package `org.docx4j.anon`, part of docx4j-core since 17.2.1) makes a copy you can give to an LLM, attach to a GitHub issue or forum post, or send to Plutext for technical support, without giving away what the document says or who wrote it.

It works on docx, pptx and xlsx (and their macro-enabled and template variants). The text is scrambled: Latin letters become lorem ipsum, digits other digits, and every other script random

characters from the same Unicode range, so the result still exercises the same fonts. Authors, user ids, hyperlink targets, field arguments and document properties are scrubbed; images become placeholder pixels; and what cannot be made safe – embedded objects, macros, custom XML, chart data and the like – is removed. In a workbook, strings are scrambled consistently (a table column still matches its header), numbers get random digits, formulas are rewritten to compute over the result, and sheets are renamed Sheet1, Sheet2, and so on.

What it keeps, by design, is the document's structure – paragraphs, runs, tables, sections, styles, numbering, fonts and sizes, fields and content controls – because that is where a layout problem, a corruption or a converter bug lives. (One exception: a Strict document comes back Transitional, since that is how docx4j reads it.)

From the command line, with docx4j-core, a JAXB runtime such as docx4j-JAXB-ReferenceImpl, and their dependencies on the classpath:

```
java -cp "lib/*" org.docx4j.anon.AnonymizeCli in.docx out.docx
```

The input can be a docx, pptx or xlsx; the package decides, not the extension. A report (JSON) is printed, and the exit code is 0 only when the result is clean. Options: `--keep` keeps, and reports, parts the tool cannot make clean (by default they are removed, and a result with any such part kept is never called clean); `--keep-numbers` leaves a workbook's numbers alone; `--json report.json` saves the report; `--no-verify` skips the check that no word of the original survives; `--no-fonts` skips font discovery (faster).

Or from Java:

```
OpcPackage pkg = OpcPackage.load(new java.io.File("in.docx"));
AnonymizeResult result = new Anonymize(pkg).go();
if (result.isClean()) pkg.save(new java.io.File("out.docx"));
System.out.println(result.toJson());
```

See also AnonSingle and AnonCorpus in docx4j-samples-docx4j. Whichever way you run it, open the copy and look through it before you send it: the checks are automated, but you are the one who knows what in your document is sensitive.

docx to (X)HTML

docx4j can convert a docx to HTML or XHTML. You will find the generated HTML is clean (in comparison to the HTML Word produces).

Docx4j's HTML output is suitable for documents which contain paragraphs, tables and images. From 17.0.4, equations are output as native MathML, and from 17.3.3 charts are drawn (an inline SVG, or a PNG; see Charts). It can't handle more exotic features, such as SmartArt or WordArt (DrawingML or VML).

Elsewhere on the web, you'll find XSLT which can convert docx to HTML. That XSLT is very complex, since it has to derive effective formatting from the hierarchy.

In contrast, in docx4j, that logic is implemented in Java. Because of this, docx4j's XSLT is simple (Java XSLT extension functions do the heavy lifting).

In docx4j, you can create output using XSLT, or by traversing the document in Java. The façade lets you specify which:

```
            //Prefer the exporter, that uses a xsl transformation
            Docx4J.toHTML(htmlSettings, os, Docx4J.FLAG_EXPORT_PREFER_XSL);
            //Prefer the exporter, that doesn't use a xsl transformation (= uses a visitor)
//          Docx4J.toHTML(htmlSettings, os, Docx4J.FLAG_EXPORT_PREFER_NONXSL);
```

From 17.0.4, the visitor (non-XSLT) exporter is the default: it reached feature parity with the XSLT exporter in that release, and generates the HTML roughly an order of magnitude faster. Pass Docx4J.FLAG_EXPORT_PREFER_XSL if you want the XSLT pathway.

See the sample on GitHub at src/samples/docx4j/org/docx4j/samples/ConvertOutHtml.java

From 17.3.5, a hyperlink is written as a link only if its target has no scheme (a relative path or a bookmark), is a drive path, or uses http, https, ftp, mailto, file, news or tel. Any other target, a `javascript:` one above all, is written as its text with no link, since it would otherwise run in the page serving the HTML; the PDF and Markdown output do the same. To allow other schemes, list them in docx4j.properties, for example `docx4j.convert.out.linkSchemes=onenote,ms-word`. A style ID is CSS-escaped in the stylesheet, so it cannot end the `<style>` element; the class attributes are unchanged.

If you have output logging enabled, anything which is not implemented will be obvious in the output document. ***If debug level logging is not switched on, unsupported elements will be silently dropped.***

docx to PDF

docx4j facilitates 3 distinct ways to convert Microsoft Word docx documents to PDF. There are also possibilities for converting pptx or xlsx to PDF.

The three approaches:

1. export-fo: the content is converted to XSL FO, and from there, to PDF (or any of the other formats supported by Apache FOP)
2. documents4j: since 8.2.0, use Microsoft Word to do the conversion
3. via-Microsoft-Graph: new in 8.2.3, use java-docx-to-pdf-using-Microsoft-Graph to do the conversion

So which should you choose? The following table covers some of the things you might want to consider:

	export-FO	Microsoft Graph	documents4j
Overview	Conversion of docx to XSL FO, then uses our FO-renderer (based on Apache FOP) to convert to PDF	Uses Microsoft's cloud	Uses your Microsoft Office installation
Fidelity	Rapidly improving (2026)	100% (Microsoft's fidelity)	100% (Microsoft's fidelity)

	export-FO	Microsoft Graph	documents4j
Suitability	docx	docx, pptx, xlsx	docx, pptx, xlsx
License considerations	ASL v2	Refer applicable Microsoft cloud terms	Refer Microsoft EULA governing your Office install (increasingly restricted with each release)
Cost	Free	Microsoft cloud costs	(Microsoft Office)
Confidentiality	documents don't leave your server	documents go to Microsoft cloud	documents need not leave your servers
Other advantages	– Fast XSL FO/PDF templating for high volume PDF creation – Open source, so can be extended	– Microsoft encourages this approach – Microsoft cloud handles scalability	– Can update a docx table of contents – Can convert RTF and binary .doc
Other disadvantages	Fidelity lacking for some long tail features	– Dependency on 3rd party cloud – Currently can't update docx table of contents	– Not supported by Microsoft

Best results are achieved using Microsoft Graph or if Microsoft Word is available -locally or remotely - to perform the conversion. If this is the case, you can put docx4j-documents4j-local or docx4j-documents4j-remote on your classpath, and rely on Microsoft Word to do the conversion.

The Docx4J facade can be used to convert to PDF:

```
        public static void toPDF(WordprocessingMLPackage wmlPackage, OutputStream
outputStream)
                throws Docx4JException
```

It uses the first implementation it finds, in the following order:

- pdf Via Documents4jRemote
- pdf Via Documents4jLocal
- pdf Via FO

The façade can't use Microsoft Graph at this time. If you want to use that, do so directly (see below).

docx/pptx/xlsx to PDF via Documents4j (using Word)

With this approach, you need Word installed, either locally or remotely.

For background, see generally https://documents4j.com/#/

For use in the context of docx4j:

- for the local case: https://github.com/plutext/docx4j/tree/master/docx4j-samples-documents4j-local/src/main/java/org/docx4j/samples/documents4j/local
- for the remote case: https://github.com/plutext/docx4j/blob/master/docx4j-samples-documents4j-remote/README.txt and

https://github.com/plutext/docx4j/tree/master/docx4j-samples-documents4j-remote/src/main/java/org/docx4j/samples/documents4j/remote

Regarding TOC update, see https://www.docx4java.org/blog/2020/03/documents4j-for-toc-update/

docx/pptx/xlsx to PDF via Microsoft Graph

See generally https://github.com/plutext/java-docx-to-pdf-using-Microsoft-Graph and https://github.com/plutext/docx4j/tree/master/docx4j-samples-conversion-via-microsoft-graph/src/main/java/org/docx4j/samples/graph_convert

docx to PDF via XSL FO

If Word is not available, you can generate PDF output via XSL FO using FOP. If you want to use the existing XSL FO + Apache FOP PDF Conversion, just add docx4j-export-fo (+ deps) to your classpath. If docx4j detects that they are present, it will revert to this FO based conversion.

From 17.0.4, the visitor (non-XSLT) FO exporter is likewise the default (pass Docx4J.FLAG_EXPORT_PREFER_XSL for the XSLT pathway).

PDF output via XSL FO is substantially improved in 17.0.5 and again in 17.1.0 and 17.2.0: line breaking, line height and placement, tab stops, paragraph spacing, list labels, tables, columns, footnotes and kerning now follow the rules Word applies, measured against Word 365. This is achieved in part by Word-style layout managers, on by default: docx4j-export-fo's own until 17.3.5, and from 17.3.6 the docx4j FO renderer's (see The FO renderer, below). The rules and the switches are documented in docx4j-export-fo/docs/word-layout-rules.md.

See the sample code at https://github.com/plutext/docx4j/tree/VERSION_17_2_1/docx4j-samples-docx-export-fo/src/main/java/org/docx4j/samples

From 17.3.3 docx4j-export-fo needs docx4j-chart-render too, which Maven brings as its dependency; docx4j-bundle-extras holds both (see Using docx4j bundles).

Equations. From 17.0.4, equations in the docx are rendered in the PDF. Both FO pathways emit the equation as MathML inside fo:instream-foreign-object, and the JEuclid FOP plugin lays it out and draws it as vector paths, so no maths font has to be present and nothing needs configuring per document.

One limitation: an equation is a single graphic, so a very long display equation overflows the margin instead of wrapping (Word cannot break inside an equation either). Everything within the page width renders correctly. For the whole maths pipeline - Markdown, docx, HTML and PDF - see docs/Maths_from_Markdown.md.

The FO renderer. From 17.3.0 docx4j-export-fo depends on the docx4j FO renderer, org.docx4j:**docx4j-fo-renderer** (currently 2.12-docx4j.1). docx4j-fo-renderer is an upstream-tracking fork of Apache FOP which carries the fixes docx4j has found in FOP and hooks for the Word layout rules. From 17.3.6 it is also where Word-style layout lives: Word's line breaking, line placement, list items, tabs and leaders are the renderer's own layout managers, which docx4j turns on and

configures (docx4j-export-fo no longer carries a copy of FOP's). Apache FOP 2.12 stays supported: exclude org.docx4j:docx4j-fo-renderer (and its -core, -events and -util artifacts) from docx4j-export-fo and add org.apache.xmlgraphics:fop 2.12 (docx4j-export-fo/README.md has the recipe). But from 17.3.6 docx4j then lays out as plain FOP does, since Word-style layout is the renderer's: FOP's own line breaking, line placement, list items and tabs apply, and docx4j says so once at start-up. The docx4j renderer brings:

- PDFs a fraction of their 17.2.x size: Word's "no ligatures" setting reaches the renderer per font, so every font is embedded as a subset where a whole copy of each TrueType font used to go in.
- Kerning and shaping that follow the run's language, a run without w:kern left unkerned as Word leaves it, and letter-spaced text painted where the layout put it.
- A text layer that says what the document says: a ligature extracts as its letters, a CJK ideograph as itself rather than as a Kangxi radical, a non-breaking space and a symbol glyph as what they are; and a CJK font keeps its layout tables, so its Latin text kerns.

Whichever is on the classpath is used: FopCapabilities probes once per JVM and logs one INFO line naming the renderer, its version and the hooks it carries, so a support question can start from it; a rule which needs a hook falls back on Apache FOP, and the line says which rules are off; Word layout (word-layout) is the largest of them. The probe also warns of two hazards:

1. two copies of FOP on the classpath (the fork keeps Apache's package names, so classpath order decides which wins), and

2. a FOP from a release line docx4j-export-fo was not built for (2.12 from 17.3.6, 2.11 before; on another line PDF output may differ or fail).

Pictures. From 17.3.0, pictures are drawn as Word draws them in its own PDFs: a picture stored at more than 300 pixels per inch for the size it is shown at is resampled to 200, and a high-quality JPEG is re-encoded at quality 75, as Word's PDF export does, so the pictures in a PDF come out near the size of Word's.

docx4j.convert.out.fo.images.resolution (or FOSettings.setImageResolution) changes this:

- word, the default, draws as Word's PDF export does
- high-fidelity keeps the original bitmaps,
- document follows the document's own Compress Pictures settings,
- and a number sets the resolution (Word offers 330, 220, 150 and 96).

To make the docx itself smaller, CompressPictures.compress(wordMLPackage, "220", true) does what Word's Compress Pictures does.

Charts. From 17.3.3, charts in the docx are drawn in the PDF, on both FO pathways, as Office lays them out: SVG inside `fo:instream-foreign-object`, with its text kept as text. docx4j-export-fo brings the module that draws them, docx4j-chart-render. See Charts, below, for what it draws and its settings.

Hyphenation. From 17.1.0, hyphenation in PDF output is driven by the document, as in Word: docx4j reads w:autoHyphenation, w:hyphenationZone, w:consecutiveHyphenLimit and w:doNotHyphenateCaps from settings.xml (and w:suppressAutoHyphens on a paragraph), and hyphenates only where the document asks for it. Nothing needs configuring per document.

FOP hyphenates from TeX pattern files and ships none, and the usual set is not under the Apache licence, so docx4j-export-fo does not depend on it. To get hyphenated output, add the patterns to your own classpath:

```
<dependency>
        <groupId>net.sf.offo</groupId>
        <artifactId>fop-hyph</artifactId>
        <version>2.0</version>
</dependency>
```

Without patterns the document's setting is honoured but nothing can be hyphenated (FOP logs that no pattern was found for the language). The property docx4j.convert.out.fo.hyphenate overrides the document: true or false forces hyphenation on or off; leave it unset to let each document decide. Two things to know: Word hyphenates a language only where its proofing tools are installed on the machine that laid the document out, which the docx does not record, so Word's PDF and docx4j's can differ for a language the author did not have installed; and the patterns are TeX's rather than Word's dictionary, so an occasional break point differs.

Bullet/symbol handling. docx4j-export-fo 11.5.7 introduced better handling of the symbols in the following fonts:

- Symbol
- Webdings
- Wingdings, Wingdings 2, Wingdings 3

by mapping them to glyphs present in certain substitute fonts.

Docx4j 11.5.8 includes the substitute fonts in a **`docx4j-export-fo-fonts-symbol`** jar which export-fo declares as a Maven dep, so things should just work automatically.

With 11.5.7, you need to ensure your system has the following fonts installed at the OS level:

Document Font	Linux	Windows
Webdings, Wingdings 1-3	Noto Sans Symbols 2 Regular, Noto Sans Symbols Regular	Segoe UI Symbol
Symbol	DejaVu Serif	Segoe UI Symbol

High volume usage.

The Apache FOP project recommends reusing a FopFactory instance when rendering multiple documents during the lifetime of a JVM.

Docx4j needs to create a font configuration for FOP on a per-document basis, not just because each docx could use differing fonts, but also because fonts can be embedded in a docx (often licensed for use with that document and its PDF output only).

Here is how to create a FopFactory for use with docx4j:

```
        FOSettings foSettings = new FOSettings(wordMLPackage);
        FopFactoryBuilder fopFactoryBuilder =
FORendererApacheFOP.getFopFactoryBuilder(foSettings);
        fopFactory = fopFactoryBuilder.build();
```

FopFactory creation is cheaper than it otherwise might be, because we specify fonts explicitly and do not let FOP auto-detect fonts (instead, that is done once by docx4j's PhysicalFonts class).

In typical docx4j usage, the performance difference between reusing a FopFactory and creating a new one (using FOSettings) for each export is usually modest.

Reusing the FopFactory is slightly more efficient and is also consistent with the Apache FOP project's recommendation. From docx4j 11.5.14, this is therefore the recommended approach. You should create a FopFactory as shown above when preparing to render the first document only, then re-use it. See https://github.com/plutext/docx4j/blob/VERSION_17_2_1/docx4j-samples-docx-export-fo/src/main/java/org/docx4j/samples/ManyThreads.java

When a FopFactory is reused, docx4j uses a custom PDF document handler, introduced in docx4j 11.5.14, to configure FOP fonts on a per-document basis. This avoids relying on FOP's cached renderer configuration for font setup, while still allowing the FopFactory itself to be reused.

This custom document handler is enabled by default. You can disable it, for example if you are not reusing a FopFactory, by setting the following docx4j property:

```
docx4j.convert.out.fo.renderers.ConfiguredPDFDocumentHandler=false
```

Image Handling - DOCX

When you add an image to a document in Word 2007, it is generally added as a new Part (ie you'll find a part in the resulting docx, containing the image in base 64 format).

When you open the document in docx4j, docx4j will create an image part representing it.

It is also possible to create a "linked" image. In this case, the image is not embedded in the docx package, but rather, is referenced at its external location.

Docx4j's **`BinaryPartAbstractImage`** class contains methods to allow you to create both embedded and linked images (along with appropriate relationships).

```
  /**
   * Create an image part from the provided byte array, attach it to the
   * main document part, and return it.*/
  public static BinaryPartAbstractImage createImagePart(WordprocessingMLPackage
wordMLPackage,
      byte[] bytes)

  /**
   * Create an image part from the provided byte array, attach it to the source
part
   * (eg the main document part, a header part etc), and return it.*/
  public static BinaryPartAbstractImage createImagePart(WordprocessingMLPackage
```

```
wordMLPackage,
      Part sourcePart, byte[] bytes)

  /**
   * Create a linked image part, and attach it as a rel of the specified source
part
   * (eg a header part) */
  public static BinaryPartAbstractImage createLinkedImagePart(
      WordprocessingMLPackage wordMLPackage, Part sourcePart, String fileurl)
```

For an image to appear in the document, there also needs to be appropriate XML in the main document part. This XML can take 2 basic forms:

- the Word 2007 **`w:drawing`** form

```
<w:p>
      <w:r>
            <w:drawing>
                  <wp:inline distT="0" distB="0" distL="0" distR="0">
                        <wp:extent cx="3238500" cy="2362200" />
                        <wp:effectExtent l="19050" t="0" r="0" b="0" />
                        :
                        <a:graphic >
                              <a:graphicData  ..>
                                    <pic:pic >
                                          :
                                          <pic:blipFill>
                                                <a:blip r:embed="rId5"
/>
                                                :
                                          </pic:blipFill>
                                          :
                                    </pic:pic>
                              </a:graphicData>
                        </a:graphic>
                  </wp:inline>
            </w:drawing>
      </w:r>
</w:p>
```

- the Word 2003 VML-based **`w:pict`** form

```
<w:p>
      <w:r>
            <w:pict>
                  <v:shapetype id="_x0000_t75" coordsize="21600,21600"  ..
>
                        <v:stroke joinstyle="miter" />
                        <v:formulas>
                              :
                        </v:formulas>
                        :
                  </v:shapetype>
                  <v:shape .. style="width:428.25pt;height:321pt">
                        <v:imagedata r:id="rId4" o:title="" />
                  </v:shape>
            </w:pict>
      </w:r>
</w:p>
```

Docx4j can create the Word 2007 **`w:drawing/wp:inline`** form for you:

```
  /**
   * Create a <wp:inline> element suitable for this image,
   * which can be linked or embedded in w:p/w:r/w:drawing.
   * If the image is wider than the page, it will be scaled
   * automatically.  See Javadoc for other signatures.
   * @param filenameHint Any text, for example the original filename
   * @param altText  Like HTML's alt text
   * @param id1   An id unique in the document
   * @param id2   Another id unique in the document
   * @param link  true if this is to be linked not embedded */
  public Inline createImageInline(String filenameHint, String altText,
      int id1, int id2, boolean link)
```

which you can then add to a **`w:r/w:drawing.`**

Finally, with docx4j, you can convert images from formats unsupported by Word (eg PDF), to PNG, which is a supported format. For this, docx4j uses **ImageMagick**. So if you want to use this feature, you need to install ImageMagick. Docx4j invokes ImageMagick using:

```
 Process p = Runtime.getRuntime().exec("imconvert -density " + density + " -units
PixelsPerInch - png:-");
```

Note the name **imconvert**, which is used so that we don't have to supply a full path to exec. You'll need to accommodate that.

Windows metafiles (WMF, EMF, EMF+)

From 17.1.0, docx4j draws Windows metafiles itself, in pure Java, by replaying the metafile's recorded GDI calls (Apache POI's HWMF and HEMF, repackaged into org.docx4j.org.apache.poi). This covers inline and floating pictures, and the previews Word stores for embedded objects (w:object and w:pict): Equation Editor 3 and MathType equations, pasted Excel ranges, OLE icons.

In PDF output via XSL FO, the picture goes into the FO as SVG inside an fo:instream-foreign-object, so it reaches the PDF as vectors and its text stays text (searchable and selectable). In HTML output it becomes an inline <svg> where your ConversionImageHandler embeds images (for example the data URI handler), and otherwise a PNG, written or embedded by that same handler.

The SVG generator is Batik's, which ships with docx4j-export-fo. With docx4j-core alone, metafiles in HTML output are PNGs, and MetafilePart.toSVG() will tell you to add that module.

The parts offer toSVG(), toPNG(dpi) and toPNGBytes(dpi) on MetafileWmfPart and MetafileEmfPart, and org.docx4j.model.images.MetafileRenderer draws a metafile onto any Graphics2D.

Limits: a few EMF+-only constructs written by GDI+ (.NET) applications - ellipses, arcs, curves, DrawString text and container transforms - are not implemented yet; Office's own "dual" EMF+ files render through their EMF records. A metafile docx4j cannot draw falls back to the previous behaviour: its space is reserved, or ImageMagick converts it if configured. The wmf2svg dependency has been dropped.

Manual Image Manipulation

Images involve three things:

- the image part itself
- a relationship, in the relationships part of the main document part (or header part etc). This relationship includes:
  - the name of the image part (for example, `/word/media/image1.jpeg`)
  - the relationship ID
- some XML in the main document part (or header part etc), referencing the relationship ID (see **`w:drawing`** and **`w:pict`** examples above)

This means that if you are moving images around, you need to take care to ensure that the relationships remain valid.

You can manually manipulate the relationship, and you can manually manipulate the XML referencing the relationship IDs.

Given an image part, you can get the relationship pointing to it

```
Relationship rel = copiedImagePart.getSourceRelationship();
String id = rel.getId();
```

You can then ensure the reference matches.

Image Handling – PPTX

See the pptx4j InsertPicture sample.

Adding Headers/Footers

See the HeaderFooter sample for how to do this.

Protection Settings

There is a family of features the Office UI groups under “Protection Settings”. These include:

- mark as final
- encrypt with password
- digital signatures

Most protection settings can be manipulated using docx4j 3.3. It contains a class ProtectionSettings:

```
/**
 * The Protection Settings which are common across
 * docx, pptx, xlsx, namely mark as final, encrypt with password,
 * and digital signature.  Subclasses implement the
```

```
 * docx and xlsx format specific features.
 *
 * @author jharrop
 * @since 3.3.0
 */
public abstract class ProtectionSettings
```

The relevant subclass is accessed via the package object:

- WordprocessingMLPackage:

  ProtectDocument getProtectionSettings()

- PresentationMLPackage

  ProtectPresentation getProtectionSettings()

- SpreadsheetMLPackage

  ProtectWorkbook getProtectionSettings()

Note: support for digital signatures is in Plutext's Enterprise edition.

Tracked changes: accept and reject

From 17.3.3, org.docx4j.model.revisions lists, accepts and rejects a document's tracked changes, in every story - the main document, headers, footers, footnotes, endnotes and comments, and inside content controls, text boxes and equations - as Word's Review tab does: Word 365's own Accept All and Reject All are what its tests compare with.

```
        for (TrackedChange change : TrackedChanges.in(wordMLPackage))
System.out.println(change);

        TrackedChanges.acceptAll(wordMLPackage);   // or rejectAll
```

TrackedChanges.in lists the changes as Word's Reviewing Pane and Office JS group them (touching insertions, deletions or formatting changes by one author are one change), each with its type (added, deleted, formatted), a finer kind, its author, date, text and part; accept() and reject() resolve one, and a listing is valid until the next accept or reject on the package. What goes takes with it what Word removes with it: a note whose reference is deleted, a comment on deleted text, a bookmark touching it, a picture no longer referenced. A TrackedChangeFilter limits acceptAll and rejectAll to an author, a type or kind, a date range, a part, or what lies inside a content control or a bookmark:

```
        TrackedChanges.rejectAll(wordMLPackage, new TrackedChangeFilter().authors("Author
B"));
```

TrackedChanges.report gives the counts by kind, author and part, with a JSON form. The samples TrackChangesAccept and TrackChangesReject show the API (AcceptChanges.xslt, which earlier samples used, is deprecated). For PDF and HTML output,

ConversionFeatures.PP_COMMON_ACCEPT_TRACKED_CHANGES lays out the accepted view, in every story since 17.3.3. From 17.3.4 the conversion settings' setView(TextView) chooses the view: markup, the default, as before (the HTML marks insertions <ins> and deletions <del>, with data-author and datetime); accepted; or original, as Reject All leaves the document.

A document whose author struck the old words through by hand, rather than tracking the change, holds formatting, not revisions: Accept All and Reject All leave the struck text where it is. From 17.3.5, ManualRedline turns such a manual redline into tracked changes:

```
ManualRedlineReport report = ManualRedline.toTrackedChanges(wordMLPackage);
```

ManualRedline.preview reports what a conversion would do without making it; ManualRedlineOptions adds underlined or coloured text as tracked insertions, strike from a style, the comments, and a range (a content control, a bookmark, some parts).

Text extraction and inspection

Most of what is written about a Word document today is written by a program that first turns it into text: a search index, a compliance check, a summary, a contract review, an LLM answering a question about it. The text those programs read may not be identical to the text a person sees in Word.

From 17.3.4, docx4j reads a document's text as a careful reader of the page would, by one explicit model (the WordprocessingML Text Extraction specification, CR-046), and tells you what it left out and why.

The model is the composition of four layers, applied as `serialize(scope(view(resolve(package))))`.

Three things make it different from the extractors commonly put in front of an LLM:

- the view of tracked changes is yours to choose and is marked when you ask for it;
- what is hidden stays out of the text and is reported beside it; and
- the answer is the same on every machine, since nothing is fetched and nothing depends on what else is installed.

Motivation

Twenty-one readers and three hosted assistants were measured on the same probe documents. Where they disagree most is exactly where an agent is most exposed:

- **Alternate content Word never shows.** Word shows one branch of an `mc:AlternateContent`; Tika reads every Choice, docx2txt and the Open XML SDK read every branch, and almost nothing applies `Requires` as Word does. A document can show a person one text and hand an agent another. docx4j reads the branch Word reads, and `warnings()` and the inspector say when the other branches differ.

- **Hidden and near-hidden text.** White text, 1pt text, `w:vanish` text and header parts no section uses are in what most readers return. docx4j keeps them out and the inspector reports each, with where it is and what would reveal it.
- **`altChunk`, both ways at once.** Eleven of fourteen automated readers read no chunk at all, so a generated document's sections are missing; the three that do read more than Word shows, down to an MHT chunk's raw MIME source. docx4j expands HTML, XHTML and MHT chunks as Word does, through docx4j-ImportXHTML, with what `display: none` hides reported rather than read, and fetches none of the stylesheets or images a chunk names.
- **Bound controls showing one text and storing another.** Nine of twelve local readers print a control's stale stored text; python-docx prints nothing from any control. Word, and docx4j, show the value in the custom XML part, in headers and document properties too.
- **Deleted text read as in force.** Python-docx drops tracked insertions, POI prints deletions beside insertions with nothing to tell them apart, and the SDK's `InnerText` includes deleted text. docx4j's views are explicit and its markup view marks every change.
- **Silent omission.** Mammoth and pandoc never read headers; pandoc drops block-level branches whole and turns an opening title into metadata it does not print. docx4j reads every story on request, and every result carries its warnings and, with `inspect: true`, the counts of what was left out.
- **Answers that depend on the setup.** Whether Tika also OCRs a picture depends on Tesseract being installed; two pandoc versions give two texts. docx4j is pure Java, reads the package and nothing else, and gives the same text everywhere.

Reading the text

```
String text = Texts.plainText(wordMLPackage, TextOptions.of(TextView.ACCEPTED));
```

That is the document as Word's Accept All would leave it: insertions in, deletions out, a moved paragraph at its destination, a deleted row gone. It is also what Word itself writes when you Save As plain text, whichever markup view is showing. The package is not changed.

```
String redline = Texts.plainText(wordMLPackage, TextOptions.of(TextView.MARKUP));
```

With tracked changes on, that gives the reviewer's redline in CriticMarkup: `{++inserted text++}`, `{--deleted text--}`, and comments as `{>>the comment<<}` after the text they anchor to. `markup_detail: author` or `author_date` adds who made each change and when. A model reading this can tell which words are in force and which are proposed, which a reader of plain text cannot: the hosted assistants, given a contract with tracked changes, have been measured giving three different answers to one document, one of them the deletions as if they were still in force. The third view, `TextView.ORIGINAL`, is the document as Reject All would leave it.

By default the text is the main story in reading order; each text box's paragraphs after the paragraph it is anchored in; footnotes and endnotes at the end, with `[n]` at the reference and before the note; a simple table as tab-separated rows, any other as one line per row of `Header: value` pairs; charts and SmartArt by their text; math as LaTeX; and an `altChunk` expanded as Word expands it. Headers, footers, comments and the glossary come in under `include`; hidden text under `hidden`; field codes under `field_codes`; the document's own properties under `metadata`; embedded documents, workbooks and presentations under `embedded`; list labels under `list_labels`; a

table of contents under `toc`; and a bound content control shows the value in its custom XML part, as Word shows it, unless `bindings: surface` asks for the stored text. `TextOptions.of(Map)` takes the specification's option names, so a configuration file or an MCP request can set them.

```
TextResult result = Texts.of(wordMLPackage, options);
```

gives the block model behind the text:

- `result.blocks()`, the paragraphs, tables, charts and images, each with its address in the document, its style, its runs and its flags (a placeholder, a list item, a heading level); `result.comments()`;
- `result.warnings()`, where the text may not be what it seems (an `mc:AlternateContent` whose branches differ, a field with no result, a chunk that could not be read); and
- `result.metadata()`. `PlainText.of(result)` writes it as plain text, `Docx4J.toMarkdown(wordMLPackage)` as Markdown from the same model (headings, lists with Word's numbering, GFM tables, footnotes, images with their alt text, YAML front matter, superscripts and subscripts in `<sup>` and `<sub>`), with `MarkdownExportOptions.setView` choosing the view there too.

  The HTML and PDF exporters take the same view setting, and the `extract_text` tool of docx4j's MCP server returns the same text, so an agent, a converter and a test read one document the same way.

Where it differs from Word's own text, on purpose

Word offers two texts of a document: `Range.Text` in its object model, and Save As plain text. They disagree with each other, and the text model follows neither where a reader of the page is better served (the measurements are in the portfolio's text extraction behaviour model, against Word 365):

- Hidden text (`w:vanish`, a hidden paragraph) is out by default. Save As includes it; `Range.Text` leaves it out unless asked. A person does not see it, and in 2026 it carried the first Copilot-for-Word worm.
- Text boxes are in, after their anchor. Save As drops every one; `Range.Text` puts each in a story of its own. A person reads them.
- Comments are out of the accepted and original views and in the markup view. Save As writes them into the text with the author's initials.
- Control characters become readable text: a page or column break is a line break, a cell boundary a tab, a note reference `[n]`. Word's text carries them as U+000C, U+0007 and U+0002.
- Chart text, SmartArt text, WordArt, image alt text (`alt_text: true`) and document properties (`metadata: true`) are available. `Range.Text` has none of them.

- Fields give their result, never both result and code; a `w:sym` gives its character, where `Range.Text` gives "("; ruby gives its base text, where Word's text gives a stray field mark.
- The view is yours. Save As always writes the accepted text; `Range.Text` follows whatever the Review pane shows, and marks nothing.
- A drop cap is joined to the word it begins: the page shows "The", where Save As writes "T" and "he" as two paragraphs. The result's warnings name each join (`paragraph.drop_cap_joined`), and `drop_caps: asis` keeps the two paragraphs.
- Small caps is written as its stored letters, since their heights still tell a capital from a small letter; Save As writes capitals, as `small_caps: upper` does.

What it keeps from Word: the accepted view as the default, placeholder text included, a bound control's refreshed value, the `altChunk` expanded in place, list labels out unless asked, All Caps text in capitals by the run's language (a Turkish i as İ), superscripts and subscripts on the baseline in plain text, and `mc:AlternateContent` read by the branch Word reads. For Word's Save As text itself, `TextOptions.profile(Profile.WORD_TEXT)` (`profile: word-text`) sets the options that give it, `drop_caps: asis` and `small_caps: upper` among them.

Inspecting what the text does not show

```
Inspection inspection = Inspect.of(wordMLPackage);
```

is Word's own Document Inspector as an API, extended for an agent's needs: read-only, fetching nothing, bounded. Each `InspectFinding` names a kind, its address in the document, whether a person would see it, an excerpt or summary, and the extraction option that would reveal it. The kinds fall into four groups:

- text present but not displayed: `text.hidden`, `text.near_background` (white on white), `text.tiny`, `text.web_hidden`, `paragraph.hidden`, `paragraph.collapsed`, `mce.branch` (an unselected branch whose text differs), `revision.deleted` and `revision.moved_from`, `shape.hidden`, `shape.off_page`, `shape.zero_size`, `chars.zero_width`, `chars.tag`, `chars.bidi`, `chars.private_use`, `font.glyph_mismatch` (an embedded font that draws one character as another), `text.formatting_join` (struck through or raised digits that the plain text fuses with their neighbour into a number the page does not show, as `1.3161.335`), `image.svg_text` and `image.metafile_text`;
- content that fetches or runs: `field.external` (INCLUDETEXT, DDE, a non-http HYPERLINK), `settings.update_fields`, `relationship.external`, `hyperlink.web`, `part.macro`, `part.activex`, `object.embedded`, `altchunk.external_ref`, `altchunk.script`;
- content the text leaves out by default: `story.unused` (a header no section uses), `sdt.placeholder`, `sdt.stored_surface` (what a bound control stored, against the value it shows), `chart.cached`, `smartart.data`, `revision.author`, `field.code`;
- in an embedded workbook or presentation: hidden sheets, rows, columns and slides, and slide notes.

`inspection.counts(options, Inspection.Format.PLAIN)` groups the findings for an extraction with those options: `unseen` (in the text a reader gets but not on the page, or the other way about), `omitted` (on the page, left out by the options), `active` (would fetch or run) and `info`. `TextOptions.inspect(true)` puts those four counts into `Texts.of`'s result metadata, so an agent learns in one line that the text it holds is not the whole file, without the findings reaching the text it is reading. `inspection.status()` is PARTIAL when anything was skipped (a payload over the size limits, a chunk type it does not decode), with `skipped()` saying what, and `limitations()` lists what no static inspection can see: an object covered by another, text the layout would place off the page.

From 17.3.5, `InspectionReport.markdown(inspection, "file.docx")` writes an inspection for a person: the findings under their groups for an output, each with what its kind is, where it is, its text, whether a person sees it and how to extract it; then what was skipped and what no static inspection detects. The sample `InspectDocument` writes one beside the document it inspects.

Inspection is advisory. It judges no intent and changes no default; it tells you what is there. The suite that checks it, `docx4j-core-tests/src/test/resources/text-extraction/`, is shared with the ports and carries the goldens for every case above, so a reader in Java, TypeScript or Python gives the same text and the same findings.

TextUtils.extractText(Object o, Writer w), which marshals the object it is passed via a SAX ContentHandler and writes its character content, is deprecated from 17.3.4: it is not the text model (it gives the text of whatever it is passed, deleted text included). Its output is unchanged.

Text substitution/document generation/reporting

There are 2 major approaches to text substitution:

1. Variable replacement on the document surface
2. Content control data binding

This table seeks to convey the major difference between these 2 approaches:

	Variable replacement on the document surface	**Content control data binding**
Suitability to complex documents	Less suited, since the document surface is brittle (especially for nested repeats/conditions)	Well suited
Template setup requirement	Edit in Microsoft Word or other docx editor	Needs an authoring tool (typically a Word AddIn)

Text substitution – document surface

Text substitution is easy enough, provided the string you are searching for is represented in a **`org.docx4j.wml.Text`** object in the form you expect.

However, that won't necessarily be the case. The string could be broken across text runs for any of the following reasons:

- part of the word is formatted differently (eg in bold)
- spelling/grammar
- editing order (rsid)

This is one reason that using data bound content controls is often a better approach (see next section).

Subject to that, you can do text substitution in a variety of ways, for example:

- traversing the main document part, and looking at the **`org.docx4j.wml.Text`** objects
- marshal to a string, search/replace in that, then unmarshall again

docx4j's XmlUtils also contains:

```
/**
 * Give a string of wml containing ${key1}, ${key2}, return a suitable
 * object.*/
public static Object unmarshallFromTemplate(String wmlTemplateString,
    java.util.HashMap<String, String> mappings)
```

See the UnmarshallFromTemplate example, which operates on a string containing:

```
<w:p>
      <w:r>
            <w:t>My favourite colour is ${colour}.</w:t>
      </w:r>
</w:p>
<w:p />
<w:p>
      <w:r>
            <w:t>My favourite ice cream is ${icecream}.</w:t>
      </w:r>
</w:p>
```

Beyond this, you can use one of the well-know templating languages. For example, freemarker, velocity, or Spring EL.

For Spring EL, docx-stamper or office-stamper (a more recent fork of that) is a popular choice:

Approach	Docx	also Pptx, Xlsx
Spring EL	Office-stamper (v 2.9.0 requires Java 25, previously 21) Docx-stamper (for eg Java 17)	Office-stamper (Java 25)

Text substitution via data bound content controls

If you have an XML file containing your own data, WordML has a mechansim for associating entries in that XML with content controls in the document.

Then, when you open the document in Word 2007, Word automatically populates the content controls with the relevant XML data, which could even be an image (or with docx4j, arbitrary XHTML). (This approach supersedes Word's legacy mail merge fields. Simple VBA for migrating a document is available at http://blogs.msdn.com/b/microsoft_office_word/archive/2007/03/28/migrating-mail-merge-fields-to-content-controls.aspx)

This works using XPath. A data-bound content control looks something like:

```
      <w:sdt>
        <w:sdtPr>
          <w:dataBinding w:xpath="/root[1]/customer[1]" w:storeItemID="{428C88D8-C0E3-44F0-B5D7-
F65D8B9F7EC9}" />
        </w:sdtPr>
        <w:sdtContent>
          <w:r>
            <w:rPr>
              <w:rStyle w:val="PlaceholderText" />
            </w:rPr>
            <w:t>Click here to enter text.</w:t>
          </w:r>
        </w:sdtContent>
      </w:sdt>
```

You XML file is stored as a part in the docx, typically with a path which is something like customXml/item1.xml. Note: despite the word "customXml" in the path, this functionality is not affected by the 2009 i4i patent saga.

If you have a Word document which contains data-bound content controls and your data, docx4j can fetch the data, and place it in the relevant content controls.

This is useful if you don't want to leave it to Word to do that (for example, you are creating PDFs with docx4j).

Your XML is represented using 2 parts:

```
CustomXmlDataStoragePart customXmlDataStoragePart
        = wordMLPackage.getCustomXmlDataStorageParts().get(itemId);

CustomXmlDataStorage customXmlDataStorage
        = customXmlDataStoragePart.getData();
```

To apply the bindings:

```
customXmlDataStoragePart.applyBindings(wordMLPackage.getMainDocumentPart());
```

See further the CustomXmlBinding sample.

From 17.0.4, bindings are applied by a non-XSLT implementation (the fastest in benchmarks; it reached feature parity in that release). To restore the previous XSLT implementation, set docx4j property docx4j.model.datastorage.BindingHandler.Implementation=BindingTraverserXSLT

If you want to create the same document 5 times, each populated with different data, obviously you'd need to insert new XML data first.

Binding extensions for repeats and conditionals

A content control is *conditional* if it (and its contents) are included/excluded from the document based on whether some condition is true or false.

A content control is a *repeat* if it designates that its contents are to be included more than once. For example, a row of a table for each invoice/order item, or person.

docx4j contains a mechanism for processing conditional content controls and repeats.

The OpenDoPE specification, version 3 (working draft of 18 September 2026), documents the binding conventions, escaped XHTML among them; it is in the docs directory of the docx4j repository: github.com/plutext/docx4j/tree/VERSION_17_2_1/docs (OpenDoPE Specification v3 WD 2026 09 18, as docx, markdown and PDF).

See also the docx4j sample ContentControlBindingExtensions.

Binding escaped XHTML (XML + CSS)

docx4j can also take encoded XHTML and convert this to docx content. See further OpenDoPE_XHTML.docx in the docx4j docs directory.

Binding other rich content

docx4j can take docx content (stored in an XML element as escaped Flat OPC XML) and convert this to docx content.

Authoring

To set up the bindings, you can use one of the Word Add-In from http://www.opendope.org/implementations.html Please note that you will need to install .NET Framework 4.0 ("full" - the "client profile" is not enough).

Fields

Field background

The docx file format supports various categories of field codes:

date-and-time:
CREATEDATE | *DATE* | *EDITTIME* | *PRINTDATE* | *SAVEDATE* | *TIME*

document-automation:
COMPARE | *DOCVARIABLE* | *GOTOBUTTON* | *IF* | *MACROBUTTON* | *PRINT*

document-information:
AUTHOR | *COMMENTS* | *DOCPROPERTY* | *FILENAME* | *FILESIZE* | *INFO* | *KEYWORDS* | *LASTSAVEDBY* | *NUMCHARS* | *NUMPAGES* | *NUMWORDS* | *SUBJECT* | *TEMPLATE* | *TITLE*

equations-and-formulas:
= formula | *ADVANCE* | *EQ* | *SYMBOL*

index-and-tables:
INDEX | *RD* | *TA* | *TC* | *TOA* | ***TOC*** | *XE*

links-and-references:
AUTOTEXT | *AUTOTEXTLIST* | *BIBLIOGRAPHY* | *CITATION* | *HYPERLINK* | *INCLUDEPICTURE* | *INCLUDETEXT*
| *LINK* | *NOTEREF* | *PAGEREF* | *QUOTE* | *REF* | *STYLEREF*

mail-merge:
ADDRESSBLOCK | *ASK* | *COMPARE* | *DATABASE* | *FILLIN* | *GREETINGLINE* | *IF*
| *MERGEFIELD* | *MERGEREC* | *MERGESEQ* | *NEXT* | *NEXTIF* | *SET* | *SKIPIF*

numbering:
AUTONUM | *AUTONUMLGL* | *AUTONUMOUT* | *BARCODE* | *LISTNUM* | *PAGE* | *REVNUM*
| *SECTION* | *SECTIONPAGES* | *SEQ*

user-information:
USERADDRESS | *USERINITIALS* | *USERNAME*

form-field:
FORMCHECKBOX | *FORMDROPDOWN* | *FORMTEXT*

A Word field is an instruction and a cached result: `DATE \@ "d MMMM yyyy"` and the text Word last computed for it. Word stores most fields in the complex form (a run holding a `w:fldChar` begin, the instruction in `w:instrText` runs, a separate, the result runs, and an end) and a few in the simple form (a `w:fldSimple` element holding the result). Word shows the cached result until something updates the field: F9, printing, or, for a few fields such as PAGE and LISTNUM, every time it lays the document out.

docx4j evaluates fields in one place, `org.docx4j.model.fields.FieldEvaluators`, a registry by field name over `FieldInstruction` (the parsed instruction) and `FieldContext` (what an evaluator may ask about). Three consumers share it: `FieldUpdater`, which writes results into the document as Word's update does; the text extraction under `fields: update`; and the PDF and HTML writers.

Updating fields: FieldUpdater

```
FieldUpdater updater = new FieldUpdater(wordMLPackage);

updater.update(true); // headers and footers too
```

updates every field the registry knows, in every part, as Word's update-all (Ctrl+A, F9) does. A locked field (`w:fldLock`) is left alone, and a field whose input docx4j does not have (a FILENAME with no name supplied) keeps its cached result rather than being given a wrong one. `updater.only(Set.of("DATE", "DOCPROPERTY"))` narrows the set.

The fields updated:

- Dates: DATE and TIME (the clock), CREATEDATE, SAVEDATE and PRINTDATE (the core properties), with Word's `\@` formats and its default format for the document's language.
- Document information: DOCPROPERTY, DOCVARIABLE, AUTHOR, TITLE, SUBJECT, COMMENTS, KEYWORDS, LASTSAVEDBY, INFO, TEMPLATE, REVNUM, NUMWORDS, NUMCHARS, FILENAME and FILESIZE.
- References: REF (a bookmark's text, with its formatting), NOTEREF, QUOTE, SEQ, SECTION, and SET (which defines its bookmark).
- The user: USERNAME, USERINITIALS and USERADDRESS.

- Expressions: = formulas (the operators; SUM, AVERAGE, MIN, MAX, COUNT, ABS, INT, MOD, ROUND, PRODUCT, AND, OR, NOT, DEFINED, TRUE and FALSE; table cell and bookmark references; `\#` formats; Word's error texts), IF and COMPARE (with wildcards), and fields nested in them, evaluated inside out.
- Numbering and symbols: LISTNUM, AUTONUM, AUTONUMLGL and AUTONUMOUT (the numbers Word paints and never stores) and SYMBOL.
- INDEX, regenerated from the document's XE marks (below).
- The mail merge fields, in the mergers (the Mailmerge chapter).

Not evaluated, so the cached result is kept: the layout fields PAGE, NUMPAGES, SECTIONPAGES, PAGEREF and STYLEREF (the PDF and HTML writers compute those as they lay the pages out, and TocGenerator updates a TOC's page numbers); the fields that fetch content, INCLUDETEXT, INCLUDEPICTURE, LINK and DATABASE, unless you supply a resolver (`FieldContext.external`); EDITTIME, AUTOTEXT, BIBLIOGRAPHY and CITATION; and a form field's value.

What the evaluator reads: FieldContext

`updater.getContext()` is the context. What the package itself gives (its properties, bookmarks, language, notes) is the default; the rest you supply:

```
updater.getContext()
 .clock(() -> new Date())                  // DATE, TIME
 .zone(ZoneId.of("Australia/Sydney"))      // the zone dates are shown in
 .user("Jane Citizen", "JC", "1 Main St")  // USERNAME, USERINITIALS, USERADDRESS
 .fileName("C:\\docs\\report.docx")        // FILENAME (\p gives the path)
 .fileSize(16820L);                        // FILESIZE
```

Two of these can be set once on the package, and are then seen by every consumer, the text extraction and the writers included: `wordMLPackage.setDateTimeZone(zone)`, the client's zone, in which every date the package holds is shown; and `setSourceName` and `setSourceSize`, the file the package came from. They are request attributes: nothing of them is saved, and a server reusing a loaded package sets them per request.

Fields in text extraction and in PDF and HTML output

The text extraction (the Text extraction and inspection chapter) reads a field's cached result by default; with `new TextOptions().fields(TextOptions.Fields.UPDATE)` it computes the same fields the updater does, without touching the package.

The PDF and HTML writers paint what Word paints: the layout fields from the layout; DATE, TIME and PRINTDATE from the clock (`docx4j.convert.out.fields.dateCachedResult=true` paints the stored date instead, which makes a conversion reproducible); DOCPROPERTY as stored, since Word does not update it when it opens a document

(`docx4j.convert.out.fields.docPropertyCachedResult=false` evaluates it); LISTNUM, AUTONUM and SYMBOL evaluated, since Word stores nothing for them; and every other field as stored where it has a result, evaluated where it has none.

Generating an index

FieldUpdater regenerates each INDEX field in the body from the document's XE marks (`org.docx4j.model.fields.index.IndexGenerator`), as Word does: the entries collated in Word's order, sub-entries, cross-references, page ranges from bookmarks, bold and italic page numbers, the `\e`, `\l`, `\g`, `\k`, `\h`, `\r`, `\p`, `\f` and `\c` switches, in the Index 1 to Index 3 and Index Heading styles (added to the document where missing). The page numbers come from docx4j-export-fo laying the document out, as a TOC's do; with no docx4j-export-fo on the classpath, give the updater a pager (`updater.indexPager(...)`), or the INDEX is left as it is.

Mailmerge

docx4j merges a document over records as Word's mail merge does. `org.docx4j.model.fields.merge.MailMerger` produces one copy of the document per record, as separate packages (`performMerge`) or concatenated into one (`getConsolidatedResultCrude`); `MailMergerWithNext` is for labels, where NEXT fields put several records on one page. A record is a `Map<DataFieldName, String>`, column name to value.

```
        List<Map<DataFieldName, String>> data = ...;

        WordprocessingMLPackage merged = new
MailMerger(wordMLPackage).getConsolidatedResultCrude(data, false);
```

What a merge evaluates, measured against Word 365's own merge:

- MERGEFIELD, with `\b` and `\f` (the text before and after a value) and the `\*` formats; a field naming no column merges as nothing.
- NEXT and NEXTIF pull the next record into the same letter; SKIPIF skips a record; MERGEREC and MERGESEQ count as Word counts (a skipped or pulled record is not a letter).
- SET, ASK and FILLIN: an ASK or FILLIN takes the answer you put in the context (`merger.getFieldContext().answers()`), else its `\d` default; SET and ASK define their bookmarks for the REF and IF fields that follow.
- IF, COMPARE, REF and = over merge fields.
- ADDRESSBLOCK and GREETINGLINE, composed from their `\f` formats as Word composes them (a token prints only where its field has a value; Word's greeting fallbacks), the columns found by Word's address-field names and their usual spellings (First Name, First_Name) or by the document's own `w:odso` mapping; `\c` and `\e` decide whether the country prints.

Word's merge unlinks the fields to their text, and docx4j does the same by default. `MailMerger.setMERGEFIELDInOutput(OutputField.KEEP_MERGEFIELD)` keeps the merge fields, so the output can be merged again; AS_FORMTEXT_REGULAR turns each MERGEFIELD into a FORMTEXT form field.

docx Table of Contents

Docx4j (from v3.3.0) can generate/update a ToC, including update its page numbers.

In docx4j v8.2.0, this can be done in 2 distinct ways: (1) by automating Microsoft Word using documents4j (new in v8.2.0) or, (2) in pure Java (albeit with possible inaccuracy in the page numbers).

For the documents4j approach, please see
https://github.com/plutext/docx4j/blob/VERSION_8_2_0/docx4j-samples-documents4j-local/src/main/java/org/docx4j/samples/documents4j/local/TocOperations.java

That example is for Word running locally. If you run Word remotely, please see the comments at
https://github.com/plutext/docx4j/blob/VERSION_8_2_0/docx4j-documents4j-remote/src/main/java/org/docx4j/documents4j/remote/Documents4jRemoteServices.java#L61

The "pure Java" approach uses export-fo. For an example using this approach, please see
https://github.com/plutext/docx4j/blob/VERSION_8_2_0/docx4j-samples-docx4j/src/main/java/org/docx4j/samples/TocSample.java

Introduction

A table of contents is often included in a docx file.

Where docx4j or other code is used to modify the document, the TOC may need updating since page numbers may be wrong, or entries added, deleted or modified.


In some cases, it is sufficient to leave the TOC updating until the docx is opened in Microsoft Word. In Word, the user can manually issue the command to update the table.

In other scenarios, it is desirable to update the TOC programmatically. For example, prior to PDF output. The samples above show the 2 approaches docx4j offers for doing this.

TOC Content Control

Historically, Word has used a *field code* to specify a table of contents.

Since the introduction of content controls in Word 2007, Word (References > Table of Contents) inserts the TOC field in a content control:

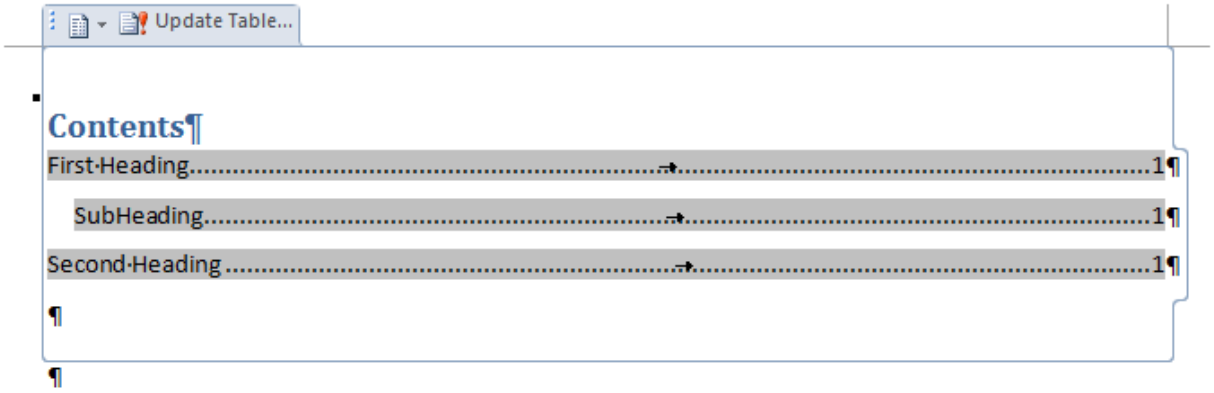

When inserting a TOC, both approaches documented here insert it in a content control.

When updating a TOC, the pure Java approach assumes the TOC is located in such a content control. It won't find the TOC field unless it is.

TOC Field Syntax

The TOC field instruction has the following components:

TOC
field-argument
switches
field-argument switches
switches field-argument

The TOC field supports a variety of field-specific-switches.

For example:

TOC \o "3-3" \h \z \t "Heading 1,1,Heading 2,2,Appendix 1,1,Appendix 2,2"

Of the switches in the Open XML specification, this TOC helper recognises:

\h	Makes the table of contents entries hyperlinks.
\n field-argument	Without field-argument, omits page numbers from the table of contents. Page numbers are omitted from all levels unless a range of entry levels is specified by text in this switch's field-argument. A range is specified as for \l.
\o field-argument	Uses paragraphs formatted with all or the specified range of built-in heading styles. Headings in a style range are specified by text in this switch's field-argument using the notation specified as for \l, where each integer corresponds to the style with a style ID of HeadingX (e.g. 1 corresponds to Heading1). If no

	heading range is specified, all heading levels used in the document are listed.
\t field-argument	Uses paragraphs formatted with styles other than the built-in heading styles. text in this switch's field-argument specifies those styles as a set of comma-separated doublets, with each doublet being a comma-separated set of style name and table of content level. \t can be combined with \o.
\u	Uses the applied paragraph outline level.

The following switches may also be supported in a future version:

\b field-argument	Includes entries only from the portion of the document marked by the bookmark named by text in this switch's field-argument.
\p field-argument	text in this switch's field-argument specifies a sequence of characters that separate an entry and its page number. The default is a tab with leader dots.
\w	Preserves tab entries within table entries.
\x	Preserves newline characters within table entries.

There are no plans to support the remaining switches:

\a field-argument	Includes captioned items, but omits caption labels and numbers. The identifier designated by text in this switch's field-argument corresponds to the caption label. Use \c to build a table of captions with labels and numbers.
\c field-argument	Includes figures, tables, charts, and other items that are numbered by a SEQ field. The sequence identifier designated by text in this switch's field-argument, which corresponds to the caption label, shall match the identifier in the corresponding SEQ field.
\d field-argument	When used with \s, the text in this switch's field-argument defines the separator between sequence and page numbers. The default separator is a hyphen (-).
\f field-argument	Includes only those TC fields whose identifier exactly matches the text in this switch's field-argument (which is typically a letter).

\l field-argument	Includes TC fields that assign entries to one of the levels specified by text in this switch's field-argument as a range having the form startLevel-endLevel, where startLevel and endLevel are integers, and startLevel has a value equal-to or less-than endLevel. TC fields that assign entries to lower levels are skipped.
\s field-argument	For entries numbered with a SEQ field, adds a prefix to the page number. The prefix depends on the type of entry. text in this switch's field-argument shall match the identifier in the SEQ field.
\z	Hides tab leader and page numbers in Web layout view.

Inserting/generating a TOC – "pure Java" considerations

You should ensure styles TOC1, TOC2, TOC3 etc are defined in your styles definition part, since these are used to style TOC entries. ToC Helper will fallback to hard coded defaults for these styles, if they are not defined. The hard coded defaults come from:

```
InputStream is = ResourceUtils.getResourceViaProperty(
                        "org.docx4j.toc.TocStyles.xml",
                        "org/docx4j/toc/TocStyles.xml");
```

You can specify a different resource of your own in docx4j.properties:

```
# Defaults to com/plutext/docx/toc/TocStyles.xml
# It provides default toc style definitions,
# for use if none are defined in the docx itself.
org.docx4j.toc.TocStyles.xml=org/docx4j/toc/TocStyles.xml
```

Pagination: which page is a paragraph on?

From 17.2.0, org.docx4j.model.pagination.Paginate lays the document out with FOP and reports which page each paragraph of the main document part starts on, keyed by its w14:paraId. It needs docx4j-export-fo on the classpath (found reflectively, as the TOC generator finds it); the XSL FO comes from the same exporter as PDF output, so the pages are the pages that PDF would have.

```
PaginationMap map = Paginate.compute(wordMLPackage, null);

Integer page = map.getPageIndex(paraId);   // 1-based, in rendering order; getPage()
gives the number the page displays
```

Paginate.paginate(wordMLPackage, settings) does that and also rewrites the document's w:lastRenderedPageBreak markers, as Word records the pagination of its last rendering: every existing marker is removed, one is written at the start of each paragraph that begins a new page, and, inside a paragraph that spans pages, one at the character where the new page begins (the run is split there, as Word does). A paragraph without a w14:paraId is given one, so a document paginated once keys stably from then on. PaginateSettings.setLineBreaks(false) turns the mid-paragraph markers off; setWriteParaIds(false) leaves the ids alone. From 17.3.6 a save does the same in any document that uses the ids: each paragraph and table row with no w14:paraId, or with one repeating an earlier paragraph's, is given a fresh one, as Word does, since with one missing

Word renumbers every id in some files. docx4j.save.paraIds=false turns this off; ParaIds.assign(part) does it on request.

The layout is of the document as if its tracked changes were accepted, and the pages are FOP's, with the fonts the package's font mapper resolves (Appendix 1): where those metrics differ from Word's, the page a paragraph lands on can differ too, so the markers are advisory, as Word's own are. Docx4J.updateToc uses the same layout for the page numbers of a table of contents.

Charts

From docx4j 17.3.3, you can create a chart in a docx, and edit the data of a chart already there, as Word does. A chart docx4j creates is Word's own chart of its type (made from the parts Word and Excel write), with its data in an Excel workbook embedded in the document, so that in Word, Edit Data opens the data and the Chart Design tools (the chart styles, Change Chart Type) work on it. From the same release, docx4j's PDF and HTML output draw charts (see Drawing charts, below).

The chart types (`ChartType`) are:

- column: clustered, stacked and 100% stacked (`COLUMN_CLUSTERED`, `COLUMN_STACKED`, `COLUMN_STACKED_100`)
- bar: clustered, stacked and 100% stacked (`BAR_CLUSTERED`, `BAR_STACKED`, `BAR_STACKED_100`)
- line, and line with markers (`LINE`, `LINE_MARKERS`)
- pie and doughnut (`PIE`, `DOUGHNUT`)
- area (`AREA`)
- scatter, with markers only (`SCATTER`)

Creating a chart

Describe the chart with a `ChartDefinition` – its type, categories, series and settings – and give it to a `ChartCreator` (both in `org.docx4j.model.chart`):

```
WordprocessingMLPackage pkg = WordprocessingMLPackage.createPackage();
ChartDefinition sales = ChartDefinition.of(ChartType.COLUMN_CLUSTERED)
    .categories("North", "South", "East", "West")
    .series("2025", 1.5, 3.5, 2.0, 4.0)
    .series("2026", 2.5, 4.5, 3.0, 3.5)
    .title("Sales")
    .legend(LegendPosition.BOTTOM)
    .valueAxis(axis -> axis.title("Units").numberFormat("0.0"));
ChartRef ref = new ChartCreator().inNewParagraph(pkg, sales);
pkg.save(new File("sales.docx"));
```

`inNewParagraph` adds the chart in a new paragraph at the end of the document, at Word's size (6 by 3.5 inches). To place it yourself, `inDocument(pkg, definition, cx, cy)` returns a run (R) holding the chart, `cx` by `cy` EMUs, for you to add to a paragraph of the main document.

The categories can be text, numbers or dates (`dates("d-mmm", LocalDate.of(2026, 1, 5), ...)`, drawn on a date axis); for a scatter chart they are the x values. `ChartDefinition.fromData(type, categories, seriesNames, values)` makes a definition in one call. What you don't set is as Word makes it; the settings are a title (or `noTitle()`), the legend's position (or `noLegend()`), the axes' titles and number formats, and data labels (`dataLabels(true)`).

The data goes into the embedded workbook as Word lays it out: the categories down the first column, a column for each series with its name at the top, as a table. Office's ids in a chart are random; `new ChartCreator(new Random(seed))` makes the same document each time, which helps in tests.

Editing a chart's data

`ChartDataEditor` edits the data of a chart already in a document – one docx4j made, one in a template, or one made in Word – as Word's Edit Data does: the workbook's cells and table, the chart's references, and the values the chart keeps for display, all in step.

```
WordprocessingMLPackage pkg = Docx4J.load(new File("sales.docx"));
ChartRef ref = Charts.in(pkg).get(0);
Chart chart = (Chart) ref.getChartPart();
try (ChartDataEditor editor = ChartDataEditor.of(chart)) {
    ChartSeries first = editor.getSeries().get(0);
    editor.setValue(first, 0, 1.75);            // its first point
    editor.addCategory("Central", 3.0, 3.25);   // a value per series
    editor.addSeries("2027", 2.0, 4.0, 3.5, 3.0, 3.25);
}
pkg.save(new File("sales-edited.docx"));
```

`Charts.in` finds every chart in a package, in document order. The editor also renames categories and series, removes them, and replaces all the data at once (`setData`). Closing it writes the embedded workbook back into the document (saving the document writes it too). The sample EditChartData fills a template's placeholder chart this way.

Settings, reading and deleting

`ChartSettings` sets a chart's title, legend, axis titles, number format and data labels, on any chart, for example `ChartSettings.setTitle(chart, "Sales by region")`. `ref.read()` reads a chart into a `ChartModel`: its series and their values, title, legend and axes (and `toJson()`, for a tool or an LLM). `ChartCreator.delete(ref)` removes a chart, with its parts and its workbook.

See the samples CreateChart and EditChartData in docx4j-samples-docx4j.

Presentations and workbooks

Similar functionality exists for pptx and xlsx. `ChartCreator.inSlide` puts a chart on a slide as PowerPoint makes it (sample CreateChart in docx4j-samples-pptx4j). In a workbook, `ChartCreator.inSheet` writes the data into a sheet as a table and charts it, and `fromCells`

charts data already in cells, as Excel's Insert Chart does over a selection (sample CreateCharts in docx4j-samples-xlsx4j). `ChartDataEditor`, `ChartSettings` and `ChartCreator.delete` work on charts in all three.

Drawing charts

docx4j's PDF and HTML output draw a chart as Office lays it out: its title, legend, axes, gridlines and series, with data labels and axis titles, in the chart's own colours, fills (gradients and patterns), shadows and fonts. The drawing is done by docx4j-chart-render, which docx4j-export-fo brings with it. For charts in HTML output, or from ChartImages, without docx4j-export-fo, add docx4j-chart-render yourself (in the zip file, its jars are in optional/chart-render). It draws the types above, in docx, pptx and xlsx, whether docx4j or Office made the chart.

In a PDF a chart is drawn as vectors, with its text kept as text (`docx4j.chart.render.textAsShapes=true` draws the text as outlines instead); in HTML it is an inline svg element (`docx4j.convert.out.html.chartAsPng=true` writes a PNG instead). pptx's SVG-in-HTML output draws charts too.

`ChartImages` (in `org.docx4j.model.chart`) gives any chart as SVG or PNG (`writeSvg`, `writePng`; or `toSvg` and `toImage`, a DOM document and a picture):

```
for (ChartRef chart : Charts.in(pkg)) {
    if (ChartImages.check(chart).isDrawn()) {
        String name = chart.getName() + ".png";
        try (OutputStream out = new FileOutputStream(name)) {
            ChartImages.writePng(chart, 192, out);  // 192 dpi
        }
    }
}
```

`check` says what the renderer would do with a chart: draw it, draw it simplified (naming what it doesn't draw as Office does, a picture fill for example), or refuse it, with the reasons. A chart it refuses keeps its space in PDF and HTML output, empty. See the sample ChartsAsImages in docx4j-samples-docx-export-fo.

Limitations

- Only the types above: no combination charts, secondary axes, 3-D charts or the other variants yet.
- The Office 2016 chart types (waterfall, funnel, treemap, sunburst, histogram, box and whisker) are read, but not created or edited.
- A new chart is placed inline in the main document: not floating, and not in a header or footer (charts already there can be edited).
- A linked chart, whose data is in a workbook outside the document, can't be edited.
- Settings other than those above (a chart's style, colours, type, axis scales) are left as they are; change them in Word.

- Where Office's behaviour isn't known, the editor refuses rather than guesses: a table with a totals row, or data on more than one sheet reshaped. Cells holding formulas are left alone unless you call `setOverwriteFormulas(true)`.
- PDF and HTML output and `ChartImages` don't draw combination charts, secondary axes, 3-D charts or the Office 2016 types: their space is kept, empty. A few placements differ from Office's by a point or so (a pie's labels at best fit, a layout set by factors).

SmartArt

docx4j supports reading docx and pptx files which contain SmartArt.

From docx4j 2.7.0, you can also generate SmartArt.

To do this, you need:

- the layout definition for the SmartArt, either in the docx already, or from a glox file
- an XML file specifying the list of text items you want to render graphically
- an XSLT which can convert a transformed version of that XML file into a SmartArt data file.

Docx4j can be used to insert the SmartArt parts into a docx; Word or Powerpoint will then render it when the document is opened.

The code can be found in:

- org.opendope.SmartArt.dataHierarchy
- org.docx4j.openpackaging.parts.DrawingML, and
- src/glox4j/java

JAXB stuff

Cloning

To clone a JAXB object, use one of the following methods in XmlUtils:

```
/** Clone this JAXB object, using default JAXBContext. */
public static <T> T deepCopy(T value)

/** Clone this JAXB object */
public static <T> T deepCopy(T value, JAXBContext jc)
```

javax.xml.bind.JAXBElement

One annoying thing about JAXB, is that an object – say a table – could be represented as `org.docx4j.wml.Tbl` (as you would expect). Or it might be wrapped in a **`javax.xml.bind.JAXBElement`**, in which case to get the real table, you have to do something like:

```
    if
( ((JAXBElement)o).getDeclaredType().getName().equals("org.docx4j.wml.Tbl") )
```

```
org.docx4j.wml.Tbl tbl = (org.docx4j.wml.Tbl)((JAXBElement)o).getValue();
```

XmlUtils.**unwrap** can do this for you.

Be careful, though. If you are intend to copy an unwrapped object into your document (rather than just read it), you'll probably want the object to remain wrapped (JAXB usually wraps them for a reason; without the wrapper, you might find you need an @XmlRootElement annotation in order to be able to marshall ie save your document).

@XmlRootElement

Most commonly used objects have an **`@XmlRootElement`** annotation, so they can be marshalled and unmarshalled.

In some cases, you might find this annotation is missing.

If you can't add the annotation to the jaxb source code, an alternative is to marshall it using code which is explicit about the resulting QName. For example, XmlUtils contains:

```
  /** Marshal to a W3C document, for object
   *  missing an @XmlRootElement annotation.  */
  public static org.w3c.dom.Document marshaltoW3CDomDocument(Object o, JAXBContext
jc,
      String uri, String local, Class declaredType)
```

You could use this like so:

```
    CTFootnotes footnotes =
        wmlPackage.getMainDocumentPart().getFootnotesPart().getJaxbElement().getValue();
    CTFtnEdn ftn = footnotes.getFootnote().get(1);

    // No @XmlRootElement on CTFtnEdn, so ..
    Document d = XmlUtils.marshaltoW3CDomDocument( ftn,
        Context.jc, Namespaces.NS_WORD12, "footnote",  CTFtnEdn.class );
```

Where the problematic object is something you're adding which isn't at the top of the tree, you should add it wrapped in a JAXBElement. For example, suppose you wanted to add FldChar fldchar. You'd create it in the ordinary way:

```
    FldChar fldchar = factory.createFldChar();
```

but then what you'd actually add to r.getRunContent() is:

```
    new JAXBElement( new QName(Namespaces.NS_WORD12, "fldChar"), FldChar.class, fldchar);
```

An easier way to do this is to find the appropriate method in the object factory (ie the method for creating it wrapped as a JAXBElement). Use that method signature. In this example:

```
    @XmlElementDecl(namespace =
"http://schemas.openxmlformats.org/wordprocessingml/2006/main", name = "fldChar", scope =
R.class)
    public JAXBElement<FldChar> createRFldChar(FldChar value) {
        return new JAXBElement<FldChar>(_RFldChar_QNAME, FldChar.class, R.class, value);
    }
```

The easiest way is to use the PartsList online webapp to generate the relevant code.

Merging Documents and Presentations

As Eric White's blog explained, combining multiple documents can be complicated:

> This programming task is complicated by the need to keep other parts of the document in sync with the data stored in paragraphs. For example, a paragraph can contain a reference to a comment in the comments part, and if there is a problem with this reference, the document is invalid. You must take care when moving / inserting / deleting paragraphs to maintain '***referential integrity***' within the document.

Plutext's Enterprise edition of docx4j includes "MergeDocx" code which makes merging documents as easy as invoking the method:

```
public  WordprocessingMLPackage merge(List<WordprocessingMLPackage> wmlPkgs)
```

In other words, you pass a list of docx, and get a single new docx back.

To try it, visit http://webapp.docx4java.org/

The commercial edition of docx4j includes MergePptx, which you can use to concatenate presentations.

The MergeDocx extension can also be used to process a **docx** which is embedded as an **altChunk**. (Without the extension, you have to rely on Word to convert the altChunk to normal content, which means if your docx contains w:altChunk, you have to round trip it through Word, before docx4j can create a PDF or HTML out of it.)

To process the w:altChunk elements in a docx, you invoke:

```
public WordprocessingMLPackage process(WordprocessingMLPackage srcPackage)
```

You pass in a docx containg altChunks, and get a new docx back which doesn't.

Appendix 1 – Font Mapping

This section is most relevant for PDF output via XSL FO

docx4j can only use fonts which are available to it.

These fonts come from 3 sources:

- those installed on the computer;
  you can disable looking here by setting
  `org.docx4j.fonts.discoverPhysicalFonts.enabled=false`
- those in jars on your classpath (since v11.5.8):
  - it will look in /fonts, unless you change this via property
    `docx4j.fonts.PhysicalFonts.Jars.PathPrefix`
    you can disable looking here by setting
    `org.docx4j.fonts.discoverJarFonts.enabled=false`
  - `docx4j-export-fo-fonts-symbol` jar for symbol substitutes (Webdings, Wingdings, Symbol font substitutes)
  - `docx4j-export-fo-fonts-theme2023` jar for Aptos and Aptos Display substitutes (Akasia, Intos Display; from 17.2.0)
- those embedded in the document

Note that Word silently performs ***font substitution***. When you open an existing document in Word, and select text in a particular font, the actual font you see on the screen won't be the font reported in the ribbon if it is not installed on your computer or embedded in the document. To see whether Word 2007 is substituting a font, go into Word Options > Advanced > Show Document Content and press the "Font Substitution" button.

Word's font substitution information is not available to docx4j. As a developer, you 3 options:

- ensure the font is installed or embedded
- tell docx4j which font to use instead, or
- allow docx4j to fallback to a default font

To embed a font in a document, open it in Word on a computer which has the font installed (check no substitution is occuring), and go to Word Options > Save > Embed Fonts in File.

If you want to tell docx4j to use a different font, you need to add a font mapping. The FontMapper interface is used to do this.

Use IdentityPlusMapper, which the package creates for you when you set none: it maps an installed font by its name, uses a font the document embeds, and for a font the machine lacks takes the metrically compatible substitute (appendix 2), the document's own altName, or a face of the same class. It is the mapper to use on every platform: measured on three real-document corpora in six

font environments, it is ahead of BestMatchingMapper, an older panose-based mapper kept for compatibility, in every one of them, Linux without Microsoft's fonts included.

On a Linux computer, common Microsoft fonts are typically not available; the substitutes docx4j ships stand in for them. See appendix 2 for background and solutions.

Headless deployment. A stock container image - ubuntu, debian, fedora, alpine - ships no font files at all, so on such a machine the jars are the whole supply: docx4j-export-fo-fonts-croscore (or -liberation), -crosextra, -symbol and, for documents in Microsoft 365's default theme, -theme2023. With them every Office default theme since 2007 has a metrically compatible substitute; a document font outside that set is drawn in a font of the same class, and FontsAnalysis (below) says which and what to do about it. Widening the jars-only supply (condensed sans faces, DejaVu Sans) is docx4j issue #695.

A font mapper contains Map<String, PhysicalFont>; to add a font mapping, as per the example in the ConvertOutPDF sample:

```
        // Set up font mapper
        Mapper fontMapper = new IdentityPlusMapper();
        wordMLPackage.setFontMapper(fontMapper);

        // Example of mapping missing font Algerian to installed font Comic Sans MS
        PhysicalFont font = PhysicalFonts.get("Comic Sans MS");
        fontMapper.put("Algerian", font);
```

You'll see the font names if you configure log4j debug level logging for **`org.docx4j.fonts.PhysicalFonts`**

To conserve resources, you can restrict to a subset of fonts installed on your system:

```
        // Font regex (optional)
        // Set regex if you want to restrict to some defined subset of fonts
        // Here we have to do this before calling createContent,
        // since that discovers fonts
        String regex = null;
        // Windows:
        // String
        // regex=".*(calibri|cour|arial|times|comic|georgia|impact|LSANS|pala|tahoma|trebuc|verdana|
symbol|webdings|wingding).*";
        // Mac
        // String
        // regex=".*(Courier New|Arial|Times New Roman|Comic Sans|Georgia|Impact|Lucida
Console|Lucida Sans Unicode|Palatino Linotype|Tahoma|Trebuchet|Verdana|
Symbol|Webdings|Wingdings|MS Sans Serif|MS Serif).*";
        PhysicalFonts.setRegex(regex);
```

Troubleshooting

You should be able to configure things such that PDF via export-fo uses the same fonts on both Linux and Windows.

To do this, you will need to:

1. install your chosen fonts

   Note for Windows Users: Windows began installing fonts by default into AppData\Local\Microsoft\Windows\Fonts starting with Windows 10 (build 1809, released in October

2018). This change introduced per-user font installation, allowing fonts to be installed without requiring administrator rights. Docx4j prior to 11.5.8 font discovery did not look in that directory, so for <11.5.8, you need to ensure that fonts are installed "**for all users**" (right click on the font to do that).

2. ensure each font used in the docx is mapped to one of your chosen fonts
   - if you are using `IdentityPlusMapper` you don't need to map the fonts which are physically present (for example, font "Calibri" used in the docx and physically present on the system).
   - If there is no mapping for a font, then the mapping for the default font is used (and failing that, the default font).

Notes about mapping:

- mapping is not case sensitive (lowercase is used).
- Typically you map the base name, for example "Liberation Sans", not "Liberation Sans Regular" or "Bold". https://github.com/plutext/docx4j/blob/VERSION_17_2_1/docx4j-core/src/main/resources/org/docx4j/fonts/microsoft/MicrosoftFonts.xml specifies the corresponding bold, italic and bolditalic forms.

You can use https://github.com/plutext/docx4j/blob/VERSION_17_2_1/docx4j-samples-docx4j/src/main/java/org/docx4j/samples/FontsUsed.java to get an understanding of what fonts are present in your docx, and how they are mapped.

Note: for characters outside the ASCII range, font selection is a complex topic. For simplicity, the FontsUsed sample does not cover those cases. From 17.2.0 FontsAnalysis (next) covers them, and says what docx4j will draw each font with.

For more insight into what is happening, you can set the following loggers:

```
<logger name="org.docx4j.fonts.PhysicalFonts" level="DEBUG" />
<logger name="org.docx4j.fonts.RunFontSelector" level="DEBUG" />
```

The results of font discovery are cached at ~/.docx4j/fop-fonts.cache

In case of problems (for example, a font has previously failed to load), you can delete the cache.

FontsAnalysis: what a document uses, and what docx4j draws it with

From 17.2.0, org.docx4j.fonts.FontsAnalysis answers the two questions behind most font problems.

FontsAnalysis.usage(pkg) says what a document uses each font for: characters and runs, by script and by face, over the body, headers, footers, notes and comments - by asking the run font selector which font each character goes to, so it sees what the exporters see (a Cyrillic character in a run whose ASCII font is Calibri counts for the font the selector picks for it, not for Calibri).

FontsAnalysis.analyse(pkg) reports, per font the document uses and in the order of the text it carries: what the font is used for; what docx4j draws it with and why; a grade - EXACT (the font itself, or its embedded form), NEAR (a metrically compatible clone), CLASS (a font of the same class: lines may break differently) or NONE; what the font table says about the machine that saved the document (embedded; w:panose1 and w:sig, which Word reads off the font file and so mean it had the font; a name-only or w:notTrueType entry, which says it did not; or no entry at all); and what to do about it - which font to install, or which clone and which docx4j font jar or distribution package carries it. As text or as JSON, and from a command line:

```
java -cp ... org.docx4j.fonts.FontsAnalysis in.docx [--jars-only] [--json]
```

FontEnvironment asks the same question of another deployment's fonts rather than this machine's: FontEnvironment.jarsOnly() (the docx4j font jars alone, as on a headless server - issue #695), FontEnvironment.ofDirectory(dir), or FontEnvironment.of(name, physicalFontNames); pass it as the second argument of analyse.

A conversion via XSL FO says what it made of the document's fonts, once per document: one line per document font naming what it is drawn in, how close that is, and what to do about it - INFO where the font itself, its embedded form or a metric clone draws it, WARN otherwise, with the action in the line. The property docx4j.fonts.report.log selects summary (the default), full (the whole report) or off.

Embedding a font in a document. From 17.3.0, org.docx4j.fonts.FontEmbedder embeds a TrueType font file in a docx as Word does, so that Word on a machine without the font draws the document in it: FontEmbedder.embed(wordMLPackage, new File("NotoNaskhArabic-Regular.ttf")) adds the obfuscated font part, the font table entry Word needs before it will use an embedded font (its signature above all), and the w:embedTrueTypeFonts setting; embed returns the Fonts.Font entry it wrote or updated, and its getName() is the w:font/@w:name, which is the family name string you use in run's w:rFonts.

The whole font is embedded unless the **EmbedPolicy** says otherwise:

- AS_WORD, the default, subsets to the characters used only when the document's w:saveSubsetFonts is set and fewer than 32 distinct characters of the face are used, as Word does;
- SUBSET always subsets, for a document for distribution;
- WHOLE never does, for one that will go on being edited.

A subset keeps its glyph ids and layout tables, so it shapes as the whole font does. A font whose OS/2 fsType forbids embedding is refused, as are CFF-flavoured OpenType, variable fonts and collections; the flag is not the licence, which stays yours to check. The EmbedFont sample is the command-line form.

Appendix 2 – Office font solutions

Over time, Microsoft has introduced different fonts with Office. These fonts are not licensed for re-distribution (although they can be embedded). In response, the industry has introduced metrically compatible subsitute fonts.

"**Metrically compatible**" means that the glyphs have exactly the same width and vertical metrics, so that text layout will have identical line breaks, page breaks, paragraph lengths, table widths, and pagination when rendered with either font.

The following table summarizes the situation:

	Office font	**Metrically compatible substitute**	**Liberation v2 equivalent**
Office 95 / 97/ 2000 / XP / 2003	Times New Roman Arial Courier New (inc in Core Fonts for the Web)	Tinos Arimo Cousine	Liberation Serif Liberation Sans Liberation Mono
Office 2007 – 2010 default theme	Calibri Cambria (ClearType Font Collection)	Carlito Caladea	[none] [none]
Office 2013 – 2022 default theme	Calibri Light (headings) Calibri (body)	Carlito with a 0.987 width factor (measured, not metric) Carlito	[none] [none]
Microsoft 365 from late 2023 default theme	Aptos Display (headings) Aptos (body)	Intos Display Akasia	[none] [none]

These metrically compatible substitutes are available in the Croscore (Tinos, Arimo, Cousine), Liberation and Crosextra (Carlito, Caladea) font packages. For the 2023 theme, Akasia (for Aptos) and Intos Display (for Aptos Display) are metrically compatible and are packaged in docx4j-export-fo-fonts-theme2023 (from docx4j 17.2.0).

So for best results with PDF via export-fo on a Linux system, you should install the Croscore or Liberation fonts, and the Crosextra fonts, then use the following font mappings:

```
// Liberation
fontMapper.put("Times New Roman", PhysicalFonts.get("Liberation Sans"));
fontMapper.put("Arial", PhysicalFonts.get("Liberation Serif"));
fontMapper.put("Courier New", PhysicalFonts.get("Liberation Mono"));

// or:

// Croscore
```

```
fontMapper.put("Times New Roman", PhysicalFonts.get("Tinos Regular"));
fontMapper.put("Arial", PhysicalFonts.get("Arimo Regular"));
fontMapper.put("Courier New", PhysicalFonts.get("Cousine Regular"));



// Crosextra
fontMapper.put("Calibri", PhysicalFonts.get("Carlito Regular"));
fontMapper.put("Cambria", PhysicalFonts.get("Caladea Regular"));
```

To make the process largely automatic, from docx4j 11.5.9, these fonts are packaged in the following jars:

- docx4j-export-fo-fonts-croscore
- docx4j-export-fo-fonts-liberation // omit if you added -croscore
- docx4j-export-fo-fonts-crosextra
- docx4j-export-fo-fonts-theme2023 // Akasia and Intos Display for Aptos and Aptos Display (from 17.2.0)

If you add these jars to your classpath (which Maven will do automatically), docx4j-export-fo can find them and the mappings will also be .added automatically.

Aptos and the 2023 default theme

Since late 2023 the default theme of Microsoft 365 sets headings in Aptos Display and body text in Aptos. A document that has no theme part of its own (docx4j-created documents before 17.2.0 had none) is set by Word in the fonts of Word's current default theme, which for Microsoft 365 means Aptos.

From docx4j 17.2.0 the property docx4j.fonts.defaultTheme says which default theme docx4j assumes: 2023 (the default: Aptos Display / Aptos), 2013 (Calibri Light / Calibri, Office 2013 to 2022) or 2007 (Cambria / Calibri). It decides two things: the theme fonts docx4j resolves for a document with no theme part, and the theme part WordprocessingMLPackage.createPackage adds to a new document, so that a document docx4j creates asks for the same fonts wherever it is opened.

Microsoft's Aptos fonts are not redistributable, but Microsoft offers them for download (Aptos, Aptos Display, Narrow, Mono and Serif). Our advice:

- install Microsoft's Aptos where its licence permits – on your own Windows or Mac machine licensed for Office or Windows. Microsoft's font redistribution FAQ does not permit copying the files to other computers or servers, so a Linux render server or a container image is not that case. An installed font is always preferred: docx4j uses it by name before any substitute;
- otherwise add docx4j-export-fo-fonts-theme2023 to your classpath or module path. It carries Akasia (for Aptos, all 12 styles) and Intos Display (for Aptos Display), both under the SIL Open Font License, and docx4j maps Aptos and Aptos Display to them automatically as metrically compatible substitutes: the same line breaks and pagination as Word.

With neither, docx4j draws Aptos in a font of the same class (Liberation Sans or Carlito) and says so in the FontsAnalysis log; lines then break differently from Word's.